


T-GD

SAE blok prirubnica, T oblik

HANSA FLEX

Karakteristike

| | |
|--------------------|---------------------------------|
| Tlačni niz | 6000 psi |
| Norma | SAE J 518 C ISO 6162 |
| Oblik izrade | T oblik |
| Izvedba | SAE blok prirubnica |
| Pričvršćenje | Unutarnji navoji za metr. vijke |
| Materijal | S355J2G3 (ST52.3) |
| Površinska zaštita | galvanski premaz |

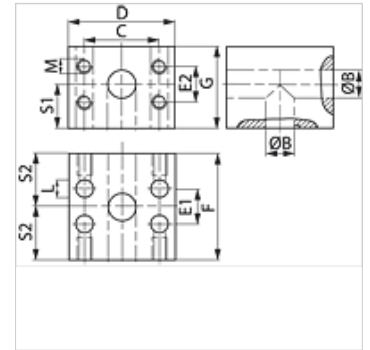

Artikli

| Naziv | PB 10.9 (bar) | Veličina | Ø B (mm) | C (mm) | D (mm) | E1 (mm) | E2 (mm) | F (mm) | G (mm) | S1 (mm) | S2 (mm) | L (mm) | M metr. |
|--------------|------------------|----------|-------------|-----------|-----------|------------|------------|-----------|-----------|------------|------------|-----------|---------|
| T GD 602-602 | 400 | 3/4" | 19 | 50,8 | 72 | 23,8 | 23,8 | 72 | 55 | 32 | 36 | 11 | M 10 |
| T GD 603-603 | 400 | 1" | 23 | 57,2 | 82 | 27,8 | 27,8 | 80 | 64 | 37 | 40 | 14 | M 12 |
| T GD 604-604 | 400 | 1.1/4" | 30 | 66,7 | 100 | 31,8 | 31,8 | 92 | 72 | 41 | 46 | 16 | M 14 |
| T GD 605-605 | 400 | 1.1/2" | 38 | 79,4 | 114 | 36,5 | 36,5 | 104 | 89 | 50 | 52 | 18 | M 16 |
| T GD 606-606 | 400 | 2" | 50 | 96,8 | 133 | 44,5 | 44,5 | 140 | 105 | 59 | 70 | 22 | M 20 |

PN = nazivni tlak PB = maks. radni tlak