


WFG JIC U (3000 / 6000 PSI)

Adapter SAE prirubnice, kovan

HANSA FLEX

Karakteristike

| | |
|---------------------|--|
| Norma | SAE J 518 C ISO 6162 |
| Dodatak kod izvedbe | kovan |
| Oblik izrade | Kutevi 90° |
| Izvedba | Adapter SAE prirubnice |
| Opseg isporuke | s 2 polovice prirubnice, kompletom vijaka i O prstenom |
| Materijal | S355J2G3 (ST52.3) |
| Površinska zaštita | galvanski premaz |

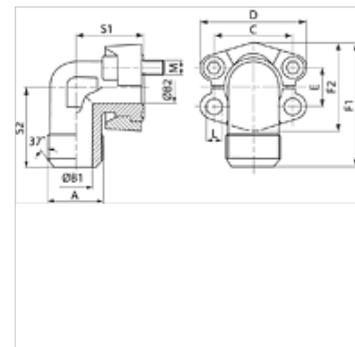

Napomena

Navedeni maksimalni radni tlak odnosi se na prirubnicu! Stvarni radni tlak određuje cijev (debljina stjenke) i kvaliteta cijevi!

Artikli

| Naziv | Tlačni niz | PB 10.9 (bar) | Veličina | A | B1 | B2 | C | D | E | F1 | F2 | S1 | S2 | L | Vijci |
|-----------------------|------------|---------------|----------|-----------------|------|------|------|------|------|-------|------|------|------|------|------------------------|
| | | | | | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | |
| WFG 3001 JIC 3/4 U | 3000 PSI | 350 | 1/2" | UNF 3/4" -16 | 9,9 | 13 | 38,1 | 54 | 17,5 | 60,8 | 45,6 | 38 | 38 | 8,7 | (4 x) UNC 5/16 x 1.1/4 |
| WFG 3001 JIC 7/8 U | 3000 PSI | 350 | 1/2" | UNF 7/8" -14 | 12,3 | 13 | 38,1 | 54 | 17,5 | 60,8 | 45,6 | 38 | 38 | 8,7 | (4 x) UNC 5/16 x 1.1/4 |
| WFG 3002 JIC 1 1/16 U | 3000 PSI | 350 | 3/4" | UNF 1.1/16" -12 | 15,5 | 19 | 47,6 | 65 | 22,2 | 70,9 | 51,8 | 42 | 45 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 3002 JIC 1 5/16 U | 3000 PSI | 350 | 3/4" | UN 1,5/16" -12 | 21,5 | 19 | 47,6 | 65 | 22,2 | 70,9 | 51,8 | 42 | 45 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 3002 JIC 7/8 U | 3000 PSI | 350 | 3/4" | UNF 7/8" -14 | 12,3 | 19 | 47,6 | 65 | 22,2 | 70,9 | 51,8 | 42 | 45 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 3003 JIC 1 1/16 U | 3000 PSI | 315 | 1" | UNF 1.1/16" -12 | 15,5 | 24 | 52,4 | 70 | 26,2 | 79,2 | 58,4 | 45 | 50 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 3003 JIC 1 5/16 U | 3000 PSI | 315 | 1" | UN 1,5/16" -12 | 21,5 | 24 | 52,4 | 70 | 26,2 | 79,2 | 58,4 | 45 | 50 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 3003 JIC 1 5/8 U | 3000 PSI | 315 | 1" | UN 1,5/8" -12 | 27,5 | 24 | 52,4 | 70 | 26,2 | 79,2 | 58,4 | 45 | 50 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 3004 JIC 1 5/16 U | 3000 PSI | 250 | 1.1/4" | UN 1,5/16" -12 | 21,5 | 31 | 58,7 | 79 | 30,2 | 85,3 | 72,6 | 50 | 59 | *1 | (4 x) UNC 7/16 x 1.1/2 |
| WFG 3004 JIC 1 5/8 U | 3000 PSI | 250 | 1.1/4" | UN 1,5/8" -12 | 27,5 | 31 | 58,7 | 79 | 30,2 | 85,3 | 72,6 | 50 | 59 | *1 | (4 x) UNC 7/16 x 1.1/2 |
| WFG 3005 JIC 1 5/8 U | 3000 PSI | 200 | 1.1/2" | UN 1,5/8" -12 | 27,5 | 38 | 69,9 | 94 | 35,7 | 117,1 | 82,2 | 76 | 76 | 13,5 | (4 x) UNC 1/2 x 1,3/4 |
| WFG 3005 JIC 1 7/8 U | 3000 PSI | 200 | 1.1/2" | UN 1,7/8" -12 | 33,0 | 38 | 69,9 | 94 | 35,7 | 117,1 | 82,2 | 76 | 76 | 13,5 | (4 x) UNC 1/2 x 1,3/4 |
| WFG 6001 JIC 3/4 U | 6000 PSI | 400 | 1/2" | UNF 3/4" -16 | 9,9 | 13 | 40,5 | 56 | 18,2 | 61,6 | 47,2 | 39 | 38 | 8,7 | (4 x) UNC 5/16 x 1.1/4 |
| WFG 6001 JIC 7/8 U | 6000 PSI | 400 | 1/2" | UNF 7/8" -14 | 12,3 | 13 | 40,5 | 56 | 18,2 | 61,6 | 47,2 | 39 | 38 | 8,7 | (4 x) UNC 5/16 x 1.1/4 |
| WFG 6002 JIC 1 1/16 U | 6000 PSI | 400 | 3/4" | UNF 1.1/16" -12 | 15,5 | 17 | 50,8 | 71 | 23,8 | 78,0 | 60,0 | 48 | 48 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 6002 JIC 1 5/16 U | 6000 PSI | 400 | 3/4" | UN 1,5/16" -12 | 21,5 | 17 | 50,8 | 71 | 23,8 | 78,0 | 60,0 | 48 | 48 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 6002 JIC 7/8 U | 6000 PSI | 400 | 3/4" | UNF 7/8" -14 | 12,3 | 17 | 50,8 | 71 | 23,8 | 78,0 | 60,0 | 48 | 48 | 10,7 | (4 x) UNC 3/8 x 1.1/2 |
| WFG 6003 JIC 1 1/16 U | 6000 PSI | 400 | 1" | UNF 1.1/16" -12 | 15,5 | 24 | 57,2 | 81 | 27,8 | 99,0 | 69,9 | 60 | 60 | *2 | (4 x) UNC 7/16 x 1,3/4 |
| WFG 6003 JIC 1 5/16 U | 6000 PSI | 400 | 1" | UN 1,5/16" -12 | 21,5 | 24 | 57,2 | 81 | 27,8 | 99,0 | 69,9 | 60 | 60 | *2 | (4 x) UNC 7/16 x 1,3/4 |
| WFG 6003 JIC 1 5/8 U | 6000 PSI | 400 | 1" | UN 1,5/8" -12 | 27,5 | 24 | 57,2 | 81 | 27,8 | 99,0 | 69,9 | 60 | 60 | *2 | (4 x) UNC 7/16 x 1,3/4 |
| WFG 6004 JIC 1 5/16 U | 6000 PSI | 400 | 1.1/4" | UN 1,5/16" -12 | 21,5 | 30 | 66,7 | 95 | 31,8 | 115,5 | 77,2 | 68 | 68 | *3 | (4 x) UNC 1/2 x 1,3/4 |
| WFG 6004 JIC 1 5/8 U | 6000 PSI | 400 | 1.1/4" | UN 1,5/8" -12 | 27,5 | 30 | 66,7 | 95 | 31,8 | 115,5 | 77,2 | 68 | 68 | *3 | (4 x) UNC 1/2 x 1,3/4 |
| WFG 6004 JIC 1 7/8 U | 6000 PSI | 400 | 1.1/4" | UN 1,7/8" -12 | 33,0 | 30 | 66,7 | 95 | 31,8 | 115,5 | 77,2 | 68 | 68 | *3 | (4 x) UNC 1/2 x 1,3/4 |
| WFG 6005 JIC 1 5/8 U | 6000 PSI | 400 | 1.1/2" | UN 1,5/8" -12 | 27,5 | 32 | 79,4 | 113 | 36,5 | 133,0 | 95,0 | 76 | 76 | 17,0 | (4 x) UNC 5/8 x 2 |
| WFG 6005 JIC 1 7/8 U | 6000 PSI | 400 | 1.1/2" | UN 1,7/8" -12 | 33,0 | 32 | 79,4 | 113 | 36,5 | 133,0 | 95,0 | 76 | 76 | 17,0 | (4 x) UNC 5/8 x 2 |

Serijska: LL = veoma lagan L = lagan S = težak - Ø = vanjski promjer cijevi - PN = nazivni tlak PB = maks. radni tlak

*1) = prema odabiru 10,5, 12,0 ili 12,5 - *2) = prema odabiru 12,0 ili 12,5 - *3) = prema odabiru 13,5 ili 14,5

Varijante proizvoda

| | |
|-----------------------------|---|
| WFG JIC (6000 PSI) | Adapter SAE prirubnice, kovan, samo prirubnica |
| WFG JIC M (3000 / 6000 PSI) | Adapter SAE prirubnice, kovan, s 2 polovice prirubnice, kompletom vijaka i O prstenom |