


VLM VA / VSM VA

Zaporna matica

HANSA FLEX

Karakteristike

| | |
|----------------------|--------------------------------|
| Priključak 1 | metrički navoji matice |
| Oblik brtve 1 | 24° vanjski konus s O prstenom |
| Izvedba | Zaporna matica |
| Oblik izrade | ravno |
| Norma | DIN 2353 ISO 8434-1 |
| Materijal | Oplemenjeni čelik |

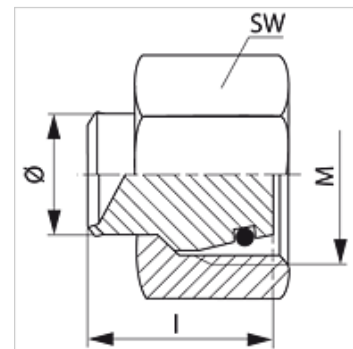

Napomena

Upute za montažu, ugradnju, tlačno opterećenje i dopuštene radne temperature pronaći ćete u tehničkim informacijama za vijčane spojeve cijevi.

Artikli

| Naziv | Serijska | Radni tlak bari | Vanjski Ø cijevi (mm) | M | l (mm) | SW (mm) | OR |
|--------------|----------|-----------------|-----------------------|------------|--------|---------|------------|
| VLM NW 04 VA | L | PN 400 | 6 | M 12 x 1,5 | 18,5 | 14 | 4,0 x 1,5 |
| VLM NW 06 VA | L | PN 400 | 8 | M 14 x 1,5 | 18,0 | 17 | 6,0 x 1,5 |
| VLM NW 08 VA | L | PN 400 | 10 | M 16 x 1,5 | 19,5 | 19 | 7,5 x 1,5 |
| VLM NW 10 VA | L | PN 400 | 12 | M 18 x 1,5 | 19,0 | 22 | 9,0 x 1,5 |
| VLM NW 13 VA | L | PN 400 | 15 | M 22 x 1,5 | 19,0 | 27 | 12,0 x 2,0 |
| VLM NW 16 VA | L | PN 315 | 18 | M 26 x 1,5 | 22,0 | 32 | 15,0 x 2,0 |
| VLM NW 20 VA | L | PN 315 | 22 | M 30 x 2 | 22,0 | 36 | 20,0 x 2,0 |
| VLM NW 25 VA | L | PN 250 | 28 | M 36 x 2 | 23,5 | 41 | 26,0 x 2,0 |
| VLM NW 32 VA | L | PN 250 | 35 | M 45 x 2 | 27,0 | 50 | 32,0 x 2,5 |
| VLM NW 40 VA | L | PN 250 | 42 | M 52 x 2 | 27,5 | 60 | 38,0 x 2,5 |
| VSM NW 03 VA | S | PN 630 | 6 | M 14 x 1,5 | 18,5 | 17 | 4,0 x 1,5 |
| VSM NW 04 VA | S | PN 630 | 8 | M 16 x 1,5 | 18,0 | 19 | 6,0 x 1,5 |
| VSM NW 06 VA | S | PN 630 | 10 | M 18 x 1,5 | 19,5 | 22 | 7,5 x 1,5 |
| VSM NW 08 VA | S | PN 630 | 12 | M 20 x 1,5 | 19,0 | 24 | 9,0 x 1,5 |
| VSM NW 10 VA | S | PN 630 | 14 | M 22 x 1,5 | 21,0 | 27 | 10,0 x 2,0 |
| VSM NW 13 VA | S | PN 400 | 16 | M 24 x 1,5 | 22,0 | 30 | 12,0 x 2,0 |
| VSM NW 16 VA | S | PN 400 | 20 | M 30 x 2 | 26,5 | 36 | 16,0 x 2,5 |
| VSM NW 20 VA | S | PN 400 | 25 | M 36 x 2 | 27,5 | 46 | 20,0 x 2,5 |
| VSM NW 25 VA | S | PN 400 | 30 | M 42 x 2 | 28,5 | 50 | 25,0 x 2,5 |
| VSM NW 32 VA | S | PN 315 | 38 | M 52 x 2 | 32,5 | 60 | 33,3 x 2,4 |

PN = nazivni tlak PB = maks. radni tlak – Serija: LL = veoma lagan L = lagan S = težak – Ø = vanjski promjer cijevi

Varijante proizvoda

VLM / VSM