


### Karakteristike

|                          |  |
|--------------------------|--|
| <b>Priključak 1 + 2</b>  | metrički vanjski navoji, cilindrični             |
| <b>Oblik brtve 1 + 2</b> | 24° unutarnji konus                              |
| <b>Izvedba</b>           | Pregradni vijčani spoj                           |
| <b>Oblik izrade</b>      | Kutevi 90°                                       |
| <b>Norma</b>             | DIN 2353<br>ISO 8434-1                           |
| <b>Opseg isporuke</b>    | Nastavak s pretunom maticom i narezanim prstenom |
| <b>Materijal</b>         | Oplemenjeni čelik                                |

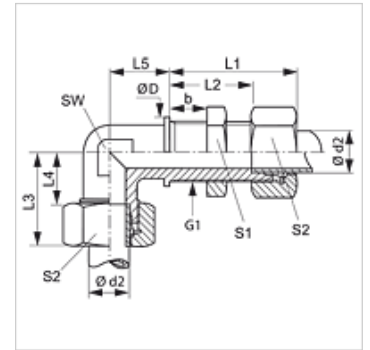

### Napomena

Upute za montažu, ugradnju, tlačno opterećenje i dopuštene radne temperature pronaći ćete u tehničkim informacijama za vijčane spojeve cijevi.

### Artikli

| Naziv          | Seriya | Radni tlak bari | Ø d2 (mm) | G1         | Ø D (mm) | b (mm) | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | SW (mm) | S1 | S2 |
|----------------|--------|-----------------|-----------|------------|----------|--------|---------|---------|---------|---------|---------|---------|----|----|
| SW NW 04 HL VA | L      | PN 315          | 6         | M 12 x 1,5 | 17       | 16     | 42      | 27,0    | 27      | 12,0    | 14      | 12      | 17 | 14 |
| SW NW 06 HL VA | L      | PN 315          | 8         | M 14 x 1,5 | 19       | 16     | 42      | 27,0    | 29      | 14,0    | 17      | 12      | 19 | 17 |
| SW NW 08 HL VA | L      | PN 315          | 10        | M 16 x 1,5 | 22       | 16     | 43      | 28,0    | 30      | 15,0    | 18      | 14      | 22 | 19 |
| SW NW 10 HL VA | L      | PN 315          | 12        | M 18 x 1,5 | 24       | 16     | 44      | 29,0    | 32      | 17,0    | 20      | 17      | 24 | 22 |
| SW NW 13 HL VA | L      | PN 315          | 15        | M 22 x 1,5 | 27       | 16     | 46      | 31,0    | 36      | 21,0    | 23      | 19      | 30 | 27 |
| SW NW 16 HL VA | L      | PN 315          | 18        | M 26 x 1,5 | 32       | 16     | 49      | 32,5    | 40      | 23,5    | 24      | 24      | 36 | 32 |
| SW NW 20 HL VA | L      | PN 160          | 22        | M 30 x 2   | 36       | 16     | 51      | 34,5    | 44      | 27,5    | 30      | 27      | 41 | 36 |
| SW NW 25 HL VA | L      | PN 160          | 28        | M 36 x 2   | 42       | 16     | 52      | 35,5    | 47      | 30,5    | 34      | 36      | 46 | 41 |
| SW NW 32 HL VA | L      | PN 160          | 35        | M 45 x 2   | 50       | 16     | 58      | 36,5    | 56      | 34,5    | 39      | 41      | 55 | 50 |
| SW NW 40 HL VA | L      | PN 160          | 42        | M 52 x 2   | 60       | 16     | 59      | 36,0    | 63      | 40,0    | 43      | 50      | 65 | 60 |
| SW NW 03 HS VA | S      | PN 630          | 6         | M 14 x 1,5 | 19       | 16     | 44      | 29,0    | 31      | 16,0    | 17      | 12      | 19 | 17 |
| SW NW 04 HS VA | S      | PN 630          | 8         | M 16 x 1,5 | 22       | 16     | 44      | 29,0    | 32      | 17,0    | 18      | 14      | 22 | 19 |
| SW NW 06 HS VA | S      | PN 630          | 10        | M 18 x 1,5 | 24       | 16     | 46      | 29,5    | 34      | 17,5    | 20      | 17      | 24 | 22 |
| SW NW 08 HS VA | S      | PN 630          | 12        | M 20 x 1,5 | 27       | 16     | 47      | 30,5    | 38      | 21,5    | 21      | 17      | 27 | 24 |
| SW NW 10 HS VA | S      | PN 630          | 14        | M 22 x 1,5 | 27       | 16     | 50      | 32,0    | 40      | 22,0    | 23      | 19      | 30 | 27 |
| SW NW 13 HS VA | S      | PN 400          | 16        | M 24 x 1,5 | 30       | 16     | 50      | 31,5    | 43      | 24,5    | 24      | 24      | 32 | 30 |
| SW NW 16 HS VA | S      | PN 400          | 20        | M 30 x 2   | 36       | 16     | 55      | 33,5    | 48      | 26,5    | 30      | 27      | 41 | 36 |
| SW NW 20 HS VA | S      | PN 400          | 25        | M 36 x 2   | 42       | 16     | 59      | 35,0    | 54      | 30,0    | 34      | 36      | 46 | 46 |
| SW NW 25 HS VA | S      | PN 400          | 30        | M 42 x 2   | 50       | 16     | 64      | 37,5    | 62      | 35,5    | 39      | 41      | 50 | 50 |
| SW NW 32 HS VA | S      | PN 315          | 38        | M 52 x 2   | 60       | 16     | 68      | 37,0    | 72      | 41,0    | 43      | 50      | 65 | 60 |

Seriya: LL = veoma lagan L = lagan S = težak - PN = nazivni tlak PB = maks. radni tlak - Ø d2 = vanjski promjer cijevi

### Varijante proizvoda

|               |  |
|---------------|--|
| <b>SW</b>     | Pregradni vijčani spoj, kut 90°, Čelik             |
| <b>SW MG</b>  | Pregradni vijčani spoj, kut 90°, Mjed              |
| <b>XSW VA</b> | Pregradni vijčani spoj, kut 90°, Oplemenjeni čelik |