


# XWMK VA

## Uvrtni vijčani spoj, kut 90°

### Karakteristike

<b>Priključak 1</b>	metrički vanjski navoj, konusni
<b>Oblik brtve 1</b>	brtvljenje navoja
<b>Priključak 2</b>	metrički vanjski navoji, cilindrični
<b>Oblik brtve 2</b>	24° unutarnji konus
<b>Izvedba</b>	Uvrtni vijčani spoj
<b>Oblik izrade</b>	Kutevi 90°
<b>Norma</b>	DIN 2353 ISO 8434-1
<b>Opseg isporuke</b>	Nastavak (bez preturne matice i nareznog prstena)
<b>Materijal</b>	Oplemenjeni čelik

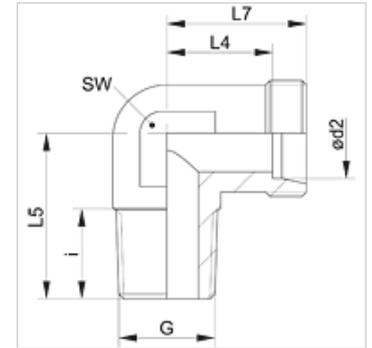

### Napomena

Upute za montažu, ugradnju, tlačno opterećenje i dopuštene radne temperature pronaći ćete u tehničkim informacijama za vijčane spojeve cijevi.

### Artikli

Naziv	Seriya	Radni tlak bari	Ø d2 (mm)	G	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	SW (mm)
XWM 04 LL 6 VA	LL	PN 100	4	M 6 x 1 K	8,0	11,0	17	15	9
XWM 04 LL VA	LL	PN 100	4	M 8 x 1 K	8,0	11,0	17	15	9
XWM 04 LL 10 VA	LL	PN 100	4	M 10 x 1 K	8,0	11,0	17	15	9
XWM 06 LL 6 VA	LL	PN 100	6	M 6 x 1 K	7,0	9,5	17	15	9
XWM 06 LL 8 VA	LL	PN 100	6	M 8 x 1 K	8,0	9,5	17	15	9
XWM 06 LL VA	LL	PN 100	6	M 10 x 1 K	9,0	9,5	17	15	9
XWM 08 LL 6 VA	LL	PN 100	8	M 6 x 1 K	8,0	11,5	20	17	12
XWM 08 LL 8 VA	LL	PN 100	8	M 8 x 1 K	8,0	11,5	20	17	12
XWM 08 LL VA	LL	PN 100	8	M 10 x 1 K	10,0	11,5	20	17	12
XWM NW 04 HL VA	L	PN 315	6	M 10 x 1 K	8,0	12,0	20	19	12
XWM NW 06 HL VA	L	PN 315	8	M 12 x 1,5 K	12,0	14,0	26	21	12
XWM NW 08 HL 12 VA	L	PN 315	10	M 12 x 1,5 K	12,0	15,0	27	22	14
XWM NW 08 HL VA	L	PN 315	10	M 14 x 1,5 K	11,5	15,0	27	22	14
XWM NW 10 HL VA	L	PN 315	12	M 16 x 1,5 K	11,5	17,0	28	24	17
XWM NW 13 HL VA	L	PN 315	15	M 18 x 1,5 K	13,5	21,0	32	28	19
XWM NW 16 HL VA	L	PN 315	18	M 22 x 1,5 K	15,0	23,5	36	31	24
XWM NW 03 HS VA	S	PN 400	6	M 12 x 1,5 K	12,0	16,0	26	23	12
XWM NW 04 HS VA	S	PN 400	8	M 14 x 1,5 K	12,0	17,0	27	24	14
XWM NW 06 HS VA	S	PN 400	10	M 16 x 1,5 K	12,0	17,5	28	25	17
XWM NW 08 HS VA	S	PN 400	12	M 18 x 1,5 K	12,0	21,5	28	29	17
XWM NW 10 HS VA	S	PN 400	14	M 20 x 1,5 K	14,0	22,0	32	30	19
XWM NW 13 HS VA	S	PN 400	16	M 22 x 1,5 K	14,0	24,5	32	33	24

Seriya: LL = veoma lagan L = lagan S = težak - PN = nazivni tlak PB = maks. radni tlak - Ø d2 = vanjski promjer cijevi

### Varijante proizvoda

<b>XWMK</b>	Uvrtni vijčani spoj, kut 90°, Čelik
<b>WMK VA</b>	Uvrtni vijčani spoj, kut 90°, Oplemenjeni čelik