


G BR HB

Spojnice, ušice

HANSA FLEX

Karakteristike

| | |
|---------------------------|--------------------------------------|
| Priključak 1 | colna ušica |
| Priključak 2 | BSP vanjski navoj, cilindrični |
| Oblik brtve 2 | 60° unutarnji konus |
| Izvedba | Spojnica, komad s prstenom i navojem |
| Oblik izrade | ravno |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

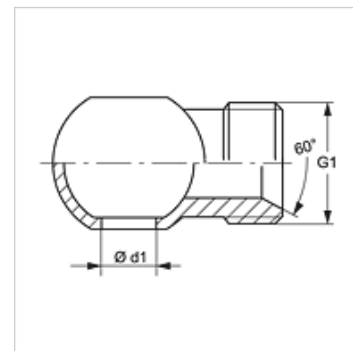

Artikli

| Naziv | G1 | Ø d1 (mm) | za šuplji vijak |
|-------------------|-------------|--------------|-----------------|
| G BR 02 HB | G 1/8" - 28 | 9,8 | R 1/8" |
| G BR 04 HB | G 1/4" - 19 | 13,2 | R 1/4" |
| G BR 06 HB | G 3/8" - 19 | 16,7 | R 3/8" |
| G BR 08 HB | G 1/2" - 14 | 21,0 | R 1/2" |
| G BR 10 HB | G 5/8" - 14 | 23,0 | R 5/8" |
| G BR 12 HB | G 3/4" - 14 | 26,5 | R 3/4" |