


Karakteristike

| | |
|--------------------|--------------------------------|
| Priključak 1 | BSP vanjski navoj, cilindrični |
| Oblik brtve 1 | 60° unutarnji konus |
| Priključak 2 | NPT unutarnji navoj |
| Oblik brtve 2 | brtvljenje navoja |
| Izvedba | Navrtni nastavci |
| Oblik izrade | ravno |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

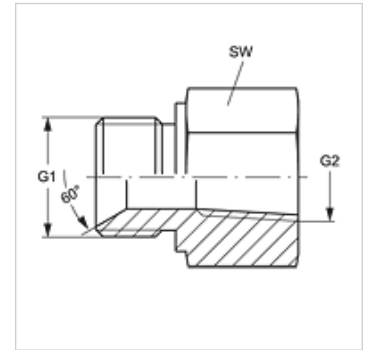

Artikli

| Naziv | G1 | G2 | SW (mm) |
|---------------|---------------|-------------------|---------|
| G HB 02 IN | G 1/8" - 28 | 1/8" -27 NPT | 14 |
| G HB 02 IN 04 | G 1/8" - 28 | 1/4" - 18 NPT | 19 |
| G HB 04 IN | G 1/4" - 19 | 1/4" - 18 NPT | 19 |
| G HB 04 IN 06 | G 1/4" - 19 | 3/8" - 18 NPT | 24 |
| G HB 06 IN 04 | G 3/8" - 19 | 1/4" - 18 NPT | 22 |
| G HB 06 IN | G 3/8" - 19 | 3/8" - 18 NPT | 24 |
| G HB 08 IN | G 1/2" -14 | 1/2" - 14 NPT | 27 |
| G HB 12 IN | G 3/4" -14 | 3/4" - 14 NPT | 36 |
| G HB 16 IN | G 1" -11 | 1" -11,5 NPT | 41 |
| G HB 20 IN | G 1,1/4" - 11 | 1,1/4" - 11,5 NPT | 50 |
| G HB 24 IN | G 1,1/2" - 11 | 1,1/2" - 11,5 NPT | 55 |

SW = širina ključa

Varijante proizvoda

G HB IN VA Navrtni nastavci, Oplemenjeni čelik