


# G HB IR L

## Navrtni nastavci

### Karakteristike

|                           |                                  |
|---------------------------|----------------------------------|
| <b>Priključak 1</b>       | BSP vanjski navoj, cilindrični   |
| <b>Oblik brtve 1</b>      | 60° unutarnji konus              |
| <b>Priključak 2</b>       | BSP unutarnji navoj, cilindrični |
| <b>Oblik brtve 2</b>      | plosnato brtvljenje              |
| <b>Izvedba</b>            | Navrtni nastavci, dugi           |
| <b>Oblik izrade</b>       | ravno                            |
| <b>Materijal</b>          | Čelik                            |
| <b>Površinska zaštita</b> | galvanski premaz                 |

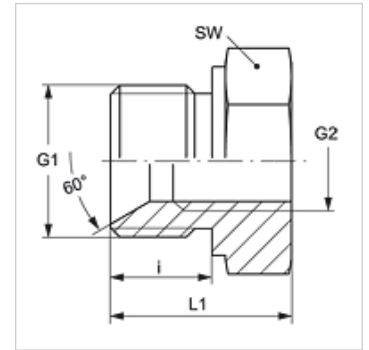

### Artikli

| Naziv                  | G1            | G2            | i<br>(mm) | L1<br>(mm) | SW<br>(mm) |
|------------------------|---------------|---------------|-----------|------------|------------|
| <b>G HB 06 IR 04 L</b> | G 3/8" - 19   | G 1/4" - 19   | 12,0      | 30,5       | 22         |
| <b>G HB 08 IR 06 L</b> | G 1/2" - 14   | G 3/8" - 19   | 16,0      | 38,0       | 30         |
| <b>G HB 16 IR 08 L</b> | G 1" - 11     | G 1/2" - 14   | 19,0      | 50,0       | 41         |
| <b>G HB 16 IR 12 L</b> | G 1" - 11     | G 3/4" - 14   | 20,5      | 47,5       | 41         |
| <b>G HB 20 IR 16 L</b> | G 1,1/4" - 11 | G 1" - 11     | 20,0      | 48,0       | 50         |
| <b>G HB 24 IR 20 L</b> | G 1,1/2" - 11 | G 1,1/4" - 11 | 22,0      | 54,5       | 55         |

SW = širina ključa