


# G HB IR L

## Navrtni nastavci

### Karakteristike

<b>Priključak 1</b>	BSP vanjski navoj, cilindrični
<b>Oblik brtve 1</b>	60° unutarnji konus
<b>Priključak 2</b>	BSP unutarnji navoj, cilindrični
<b>Oblik brtve 2</b>	plosnato brtvljenje
<b>Izvedba</b>	Navrtni nastavci, dugi
<b>Oblik izrade</b>	ravno
<b>Materijal</b>	Čelik
<b>Površinska zaštita</b>	galvanski premaz

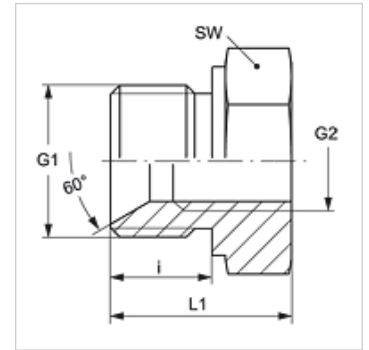

### Artikli

Naziv	G1	G2	i (mm)	L1 (mm)	SW (mm)
<b>G HB 06 IR 04 L</b>	G 3/8" - 19	G 1/4" - 19	12,0	30,5	22
<b>G HB 08 IR 06 L</b>	G 1/2" - 14	G 3/8" - 19	16,0	38,0	30
<b>G HB 16 IR 08 L</b>	G 1" - 11	G 1/2" - 14	19,0	50,0	41
<b>G HB 16 IR 12 L</b>	G 1" - 11	G 3/4" - 14	20,5	47,5	41
<b>G HB 20 IR 16 L</b>	G 1,1/4" - 11	G 1" - 11	20,0	48,0	50
<b>G HB 24 IR 20 L</b>	G 1,1/2" - 11	G 1,1/4" - 11	22,0	54,5	55

SW = širina ključa