

G IN HJ VA

Spojni nastavci

HANSA FLEX

Karakteristike

Priključak 1 NPT unutarnji navoj

Oblik brtve 1 brtvljenje navoja


Priključak 2 UN/UNF vanjski navoji

Oblik brtve 2 74° vanjski konus

Izvedba Spojni nastavci

Oblik izrade ravno

Materijal Oplemenjeni čelik

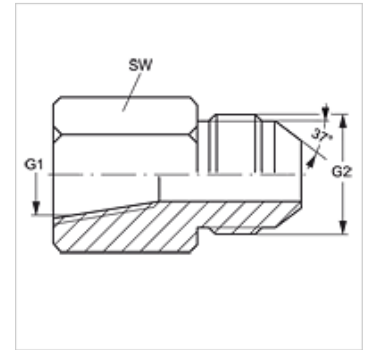

Artikli

| Naziv | G1 | G2 | SW (mm) |
|-------------------------|---------------|----------------|------------|
| G IN 02 HJ 04 VA | 1/8" -27 NPT | 7/16" -20 UNF | 14 |
| G IN 04 HJ VA | 1/4" - 18 NPT | 7/16" -20 UNF | 19 |
| G IN 04 HJ 05 VA | 1/4" - 18 NPT | 1/2" -20 UNF | 19 |
| G IN 04 HJ 06 VA | 1/4" - 18 NPT | 9/16" - 18 UNF | 19 |
| G IN 06 HJ VA | 3/8" - 18 NPT | 9/16" - 18 UNF | 22 |
| G IN 06 HJ 08 VA | 3/8" - 18 NPT | 3/4" - 16 UNF | 22 |
| G IN 08 HJ VA | 1/2" - 14 NPT | 3/4" - 16 UNF | 29 |
| G IN 08 HJ 10 VA | 1/2" - 14 NPT | 7/8" - 14 UNF | 29 |
| G IN 12 HJ VA | 3/4" - 14 NPT | 1.1/16" -12 UN | 35 |

SW = širina ključa

Varijante proizvoda

G IN HJ Spojni nastavci, Čelik