


# GE H00R

Uvrtni nastavci

**HANSA FLEX**

## Karakteristike

|                    |                                      |
|--------------------|--------------------------------------|
| Priključak 1       | metrički vanjski navoji, cilindrični |
| Oblik brtve 1      | 60° unutarnji konus                  |
| Priključak 2       | BSP vanjski navoj, cilindrični       |
| Oblik brtve 2      | Profil A                             |
| Izvedba            | Uvrtni nastavci                      |
| Oblik izrade       | ravno                                |
| Materijal          | Čelik                                |
| Površinska zaštita | galvanski premaz                     |

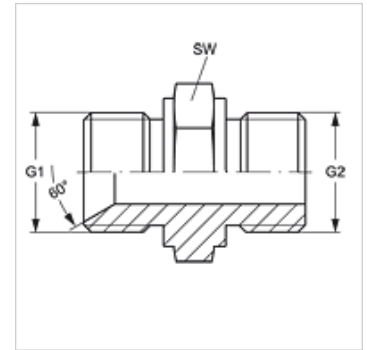

## Artikli

| Naziv        | G1         | G2            | SW<br>(mm) |
|--------------|------------|---------------|------------|
| GE H 06 R    | M 14 x 1,5 | G 1/4" - 19   | 19         |
| GE H 08 R 06 | M 16 x 1,5 | G 1/4" - 19   | 22         |
| GE H 08 R 10 | M 16 x 1,5 | G 3/8" - 19   | 22         |
| GE H 10 R    | M 18 x 1,5 | G 3/8" - 19   | 24         |
| GE H 10 R 13 | M 18 x 1,5 | G 1/2" -14    | 27         |
| GE H 13 R    | M 22 x 1,5 | G 1/2" -14    | 27         |
| GE H 13 R 20 | M 22 x 1,5 | G 3/4" -14    | 32         |
| GE H 16 R 13 | M 26 x 1,5 | G 1/2" -14    | 27         |
| GE H 16 R 20 | M 26 x 1,5 | G 3/4" -14    | 32         |
| GE H 20 R    | M 30 x 1,5 | G 3/4" -14    | 32         |
| GE H 20 R 25 | M 30 x 1,5 | G 1" -11      | 41         |
| GE H 25 R    | M 38 x 1,5 | G 1" -11      | 41         |
| GE H 32 R    | M 45 x 1,5 | G 1,1/4" - 11 | 50         |
| GE H 40 R    | M 52 x 1,5 | G 1,1/2" - 11 | 55         |
| GE H 50 R    | M 65 x 2   | G 2" -11      | 70         |
| GE H 60 R    | M 78 x 2   | G 2,1/2" - 11 | 85         |

SW = širina ključa

## Varijante proizvoda

GE H00R VA Uvrtni nastavci, Oplemenjeni čelik