

GE HRED HJ VA

Uvrtni nastavci

HANSA FLEX

Karakteristike

Priključak 1 BSP vanjski navoj, cilindrični

Oblik brtve 1 Profil E


Priključak 2 UN/UNF vanjski navoji

Oblik brtve 2 74° vanjski konus

Izvedba Uvrtni nastavci

Oblik izrade ravno

Materijal Oplemenjeni čelik

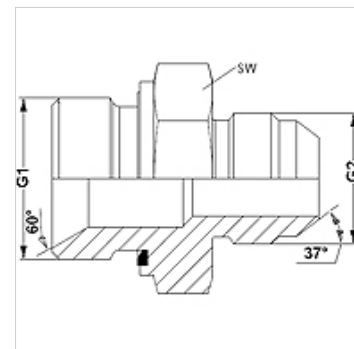

Napomene uz narudžbu

Ulošci NBR ulošci brtve

FPM (Viton) na zahtjev

Artikli

Naziv	G1	G2	SW (mm)
GE HRED 02 HJ 04 VA	G 1/8" - 28	7/16" -20 UNF	14
GE HRED 04 HJ 05 VA	G 1/4" - 19	1/2" -20 UNF	19
GE HRED 04 HJ 06 VA	G 1/4" - 19	9/16" - 18 UNF	19
GE HRED 04 HJ 08 VA	G 1/4" - 19	3/4" - 16 UNF	19
GE HRED 04 HJ VA	G 1/4" - 19	7/16" -20 UNF	19
GE HRED 06 HJ 04 VA	G 3/8" - 19	7/16" -20 UNF	22
GE HRED 06 HJ 05 VA	G 3/8" - 19	1/2" -20 UNF	22
GE HRED 06 HJ 08 VA	G 3/8" - 19	3/4" - 16 UNF	22
GE HRED 06 HJ VA	G 3/8" - 19	9/16" - 18 UNF	22
GE HRED 08 HJ 06VA	G 1/2" -14	9/16" - 18 UNF	27
GE HRED 08 HJ 10 VA	G 1/2" -14	7/8" - 14 UNF	27
GE HRED 08 HJ 12 VA	G 1/2" -14	1.1/16" -12 UN	27
GE HRED 08 HJ VA	G 1/2" -14	3/4" - 16 UNF	27
GE HRED 12 HJ 10 VA	G 3/4" -14	7/8" - 14 UNF	32
GE HRED 12 HJ 16 VA	G 3/4" -14	1,5/16" -12 UN	36
GE HRED 12 HJ VA	G 3/4" -14	1.1/16" -12 UN	32
GE HRED 16 HJ 20 VA	G 1" -11	1,5/8" -12 UN	46
GE HRED 16 HJ VA	G 1" -11	1,5/16" -12 UN	41
GE HRED 20 HJ 24 VA	G 1,1/4" - 11	1,7/8" -12 UN	50
GE HRED 20 HJ VA	G 1,1/4" - 11	1,5/8" -12 UN	50
GE HRED 24 HJ VA	G 1,1/2" - 11	1,7/8" -12 UN	55

SW = širina ključa

Varijante proizvoda

GE HRED HJ Uvrtni nastavci, Čelik

Rezervni dijelovi

WD V Meka brtva JIC