


GE HRED HJ

Uvrtni nastavci

HANSA FLEX

Karakteristike

| | |
|--------------------|--------------------------------|
| Priključak 1 | BSP vanjski navoj, cilindrični |
| Oblik brtve 1 | Profil E |
| Priključak 2 | UN/UNF vanjski navoji |
| Oblik brtve 2 | 74° vanjski konus |
| Izvedba | Uvrtni nastavci |
| Oblik izrade | ravno |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

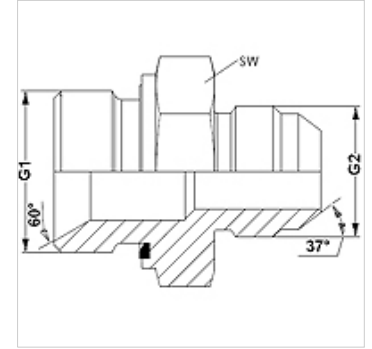

Artikli

| Naziv | G1 | G2 | SW (mm) |
|------------------|---------------|----------------|------------|
| GE HRED 02 HJ 04 | G 1/8" - 28 | 7/16" -20 UNF | 14 |
| GE HRED 02 HJ 05 | G 1/8" - 28 | 1/2" -20 UNF | 14 |
| GE HRED 02 HJ 06 | G 1/8" - 28 | 9/16" - 18 UNF | 19 |
| GE HRED 04 HJ | G 1/4" - 19 | 7/16" -20 UNF | 19 |
| GE HRED 04 HJ 05 | G 1/4" - 19 | 1/2" -20 UNF | 19 |
| GE HRED 04 HJ 06 | G 1/4" - 19 | 9/16" - 18 UNF | 19 |
| GE HRED 04 HJ 08 | G 1/4" - 19 | 3/4" - 16 UNF | 19 |
| GE HRED 06 HJ 04 | G 3/8" - 19 | 7/16" -20 UNF | 22 |
| GE HRED 06 HJ 05 | G 3/8" - 19 | 1/2" -20 UNF | 22 |
| GE HRED 06 HJ | G 3/8" - 19 | 9/16" - 18 UNF | 22 |
| GE HRED 06 HJ 08 | G 3/8" - 19 | 3/4" - 16 UNF | 22 |
| GE HRED 06 HJ 10 | G 3/8" - 19 | 7/8" - 14 UNF | 24 |
| GE HRED 06 HJ 12 | G 3/8" - 19 | 1.1/16" -12 UN | 27 |
| GE HRED 08 HJ 04 | G 1/2" -14 | 7/16" -20 UNF | 27 |
| GE HRED 08 HJ 06 | G 1/2" -14 | 9/16" - 18 UNF | 27 |
| GE HRED 08 HJ | G 1/2" -14 | 3/4" - 16 UNF | 27 |
| GE HRED 08 HJ 10 | G 1/2" -14 | 7/8" - 14 UNF | 27 |
| GE HRED 08 HJ 12 | G 1/2" -14 | 1.1/16" -12 UN | 27 |
| GE HRED 12 HJ 08 | G 3/4" -14 | 3/4" - 16 UNF | 32 |
| GE HRED 12 HJ 10 | G 3/4" -14 | 7/8" - 14 UNF | 32 |
| GE HRED 12 HJ | G 3/4" -14 | 1.1/16" -12 UN | 32 |
| GE HRED 12 HJ 16 | G 3/4" -14 | 1,5/16" -12 UN | 36 |
| GE HRED 16 HJ 12 | G 1" -11 | 1.1/16" -12 UN | 41 |
| GE HRED 16 HJ | G 1" -11 | 1,5/16" -12 UN | 41 |
| GE HRED 16 HJ 20 | G 1" -11 | 1,5/8" -12 UN | 46 |
| GE HRED 16 HJ 24 | G 1" -11 | 1,7/8" -12 UN | 50 |
| GE HRED 20 HJ 16 | G 1,1/4" - 11 | 1,5/16" -12 UN | 50 |
| GE HRED 20 HJ | G 1,1/4" - 11 | 1,5/8" -12 UN | 50 |
| GE HRED 20 HJ 24 | G 1,1/4" - 11 | 1,7/8" -12 UN | 50 |
| GE HRED 24 HJ 20 | G 1,1/2" - 11 | 1,5/8" -12 UN | 55 |
| GE HRED 24 HJ | G 1,1/2" - 11 | 1,7/8" -12 UN | 55 |

SW = širina ključa

Varijante proizvoda

GE HRED HJ VA Uvrtni nastavci, Oplemenjeni čelik

Rezervni dijelovi

WD Meka brtva za ED vijčane spojeve