

GE HRK HJ VA

Uvrtni nastavci

HANSA FLEX

Karakteristike

Priključak 1 BSP vanjski navoj, konusni

Oblik brtve 1 brtvljenje navoja


Priključak 2 UN/UNF vanjski navoji

Oblik brtve 2 74° vanjski konus

Izvedba Uvrtni nastavci

Oblik izrade ravno

Materijal Oplemenjeni čelik

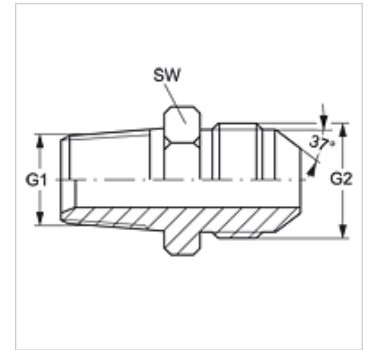

Artikli

Naziv	G1	G2	SW (mm)
GE HRK 02 HJ 04 VA	R 1/8" K	7/16" -20 UNF	13
GE HRK 04 HJ VA	R 1/4" K	7/16" -20 UNF	14
GE HRK 04 HJ 05 VA	R 1/4" K	1/2" -20 UNF	14
GE HRK 04 HJ 06 VA	R 1/4" K	9/16" - 18 UNF	16
GE HRK 06 HJ VA	R 3/8" K	9/16" - 18 UNF	19
GE HRK 06 HJ 08 VA	R 3/8" K	3/4" - 16 UNF	19
GE HRK 08 HJ 06 VA	R 1/2" K	9/16" - 18 UNF	22
GE HRK 08 HJ VA	R 1/2" K	3/4" - 16 UNF	22
GE HRK 08 HJ 10 VA	R 1/2" K	7/8" - 14 UNF	24
GE HRK 12 HJ VA	R 3/4" K	1.1/16" -12 UN	27

SW = širina ključa

Varijante proizvoda

GE HRK HJ Uvrtni nastavci, Čelik