

# GE HRK HJ VA

Uvrtni nastavci

**HANSA FLEX**

## Karakteristike

**Priključak 1** BSP vanjski navoj, konusni

**Oblik brtve 1** brtvljenje navoja


**Priključak 2** UN/UNF vanjski navoji

**Oblik brtve 2** 74° vanjski konus

**Izvedba** Uvrtni nastavci

**Oblik izrade** ravno

**Materijal** Oplemenjeni čelik

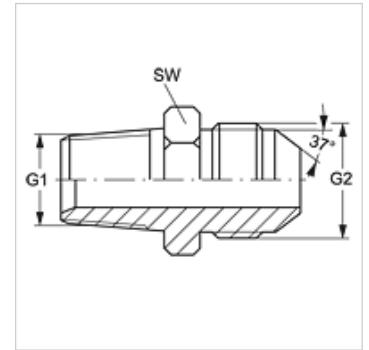

## Artikli

| Naziv              | G1       | G2             | SW<br>(mm) |
|--------------------|----------|----------------|------------|
| GE HRK 02 HJ 04 VA | R 1/8" K | 7/16" -20 UNF  | 13         |
| GE HRK 04 HJ VA    | R 1/4" K | 7/16" -20 UNF  | 14         |
| GE HRK 04 HJ 05 VA | R 1/4" K | 1/2" -20 UNF   | 14         |
| GE HRK 04 HJ 06 VA | R 1/4" K | 9/16" - 18 UNF | 16         |
| GE HRK 06 HJ VA    | R 3/8" K | 9/16" - 18 UNF | 19         |
| GE HRK 06 HJ 08 VA | R 3/8" K | 3/4" - 16 UNF  | 19         |
| GE HRK 08 HJ 06 VA | R 1/2" K | 9/16" - 18 UNF | 22         |
| GE HRK 08 HJ VA    | R 1/2" K | 3/4" - 16 UNF  | 22         |
| GE HRK 08 HJ 10 VA | R 1/2" K | 7/8" - 14 UNF  | 24         |
| GE HRK 12 HJ VA    | R 3/4" K | 1.1/16" -12 UN | 27         |

SW = širina ključa

## Varijante proizvoda

GE HRK HJ Uvrtni nastavci, Čelik