

ND AB

Utična nazuvica, DKR

HANSA FLEX

Karakteristike

Priključak 1 BSP vanjski navoj, cilindrični


Oblik brtve 1 60° vanjski konus

Kratika DKR

Norma ISO 8434-6
BS 5200

Materijal Čelik

Površinska zaštita galvanski premaz

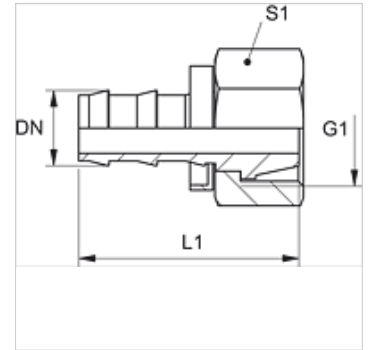

Napomena

Neoštećene nazuvice možete upotrijebiti ponovno.

Artikl

Naziv	DN	Veličina	Col	G1	L1 (mm)	S1
ND 06 AB	6	4	1/4"	G 1/4" - 19	33,0	17
ND 10 AB	10	6	3/8"	G 3/8" - 19	37,0	19
ND 13 AB	12	8	1/2"	G 1/2" -14	42,0	27
ND 16 AB	16	10	5/8"	G 5/8" -14	53,0	30
ND 20 AB	19	12	3/4"	G 3/4" -14	58,0	32
ND 25 AB	25	16	1"	G 1" -11	57,0	41

Pribor

ND ASR GE, RO, BL Granični prsten za utičnu nazuvicu