


Karakteristike

| | |
|---------------------------|---------------------------------------|
| Priključak 1 | metrički navoji matice |
| Oblik brtve 1 | 24°/60° Universal sealing head |
| Kratika | DKL |
| Norma | ISO 8434-1 |
| Opseg isporuke | Pritisna nazuvica + pritisni podnožak |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

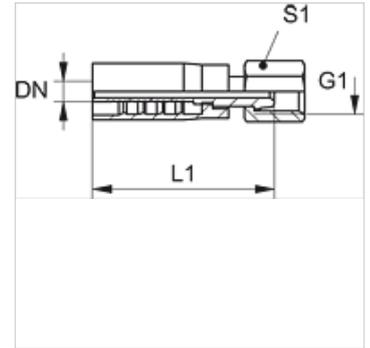

Artikli

| Naziv | DN | Veličina | Col | G1 | za vanjski Ø cijevi (mm) | L1 (mm) | S1 |
|----------------|----|----------|-------|------------|--------------------------|---------|----|
| PAY 306 AFL | 6 | 4 | 1/4" | M 14 x 1,5 | 8 | 46,0 | 17 |
| PAY 306 AFL 08 | 6 | 4 | 1/4" | M 16 x 1,5 | 10 | 46,0 | 19 |
| PAY 308 AFL | 8 | 5 | 5/16" | M 16 x 1,5 | 10 | 46,0 | 19 |
| PAY 310 AFL 08 | 10 | 6 | 3/8" | M 16 x 1,5 | 10 | 49,0 | 22 |
| PAY 310 AFL | 10 | 6 | 3/8" | M 18 x 1,5 | 12 | 48,0 | 22 |
| PAY 313 AFL | 12 | 8 | 1/2" | M 22 x 1,5 | 15 | 51,0 | 27 |
| PAY 313 AFL 16 | 12 | 8 | 1/2" | M 26 x 1,5 | 18 | - | - |
| PAY 316 AFL | 16 | 10 | 5/8" | M 26 x 1,5 | 18 | - | - |
| PAY 320 AFL | 19 | 12 | 3/4" | M 30 x 2 | 22 | - | - |