


# PN AJF 45

Pritisna nazuvica, ORFS W45°

**HANSA FLEX**

## Karakteristike

|                    |  |
|--------------------|--|
| Područje primjene  | Pritisna nazuvica za HD 100- do HD 400-, KP-, TE crijeva |
| Priključak 1       | UN/UNF navoji matice                                     |
| Oblik brtve 1      | plosnato brtvljenje                                      |
| Kratica            | ORFS   |
| Norma              | ISO 8434- 3  |
| Materijal          | Čelik  |
| Površinska zaštita | galvanski premaz   |

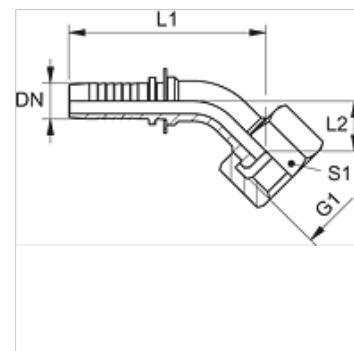

## Napomena

Odgovarajući podnožak molimo da odaberete prema tipu crijeva.

## Artikli

| Naziv               | DN | Veličina | Col    | Radni tlak (bar) | G1              | L1 (mm) | L2 (mm) | S1 |
|---------------------|----|----------|--------|------------------|-----------------|---------|---------|----|
| PN 06 AJF 45        | 6  | 4        | 1/4"   | 413,0            | 9/16" - 18 UNF  | 60,0    | 12,0    | 17 |
| PN 06 AJF 45 L10    | 6  | 4        | 1/4"   | 413,0            | 9/16" - 18 UNF  | 60,0    | 10,0    | 17 |
| PN 06 AJF 10 45     | 6  | 4        | 1/4"   | 413,0            | 11/16" - 16 UN  | 61,0    | 13,5    | 22 |
| PN 08 AJF 10 45     | 8  | 5        | 5/16"  | 413,0            | 11/16" - 16 UN  | 80,0    | 21,0    | 22 |
| PN 08 AJF 10 45 L11 | 8  | 5        | 5/16"  | 413,0            | 11/16" - 16 UN  | 80,0    | 11,0    | 22 |
| PN 10 AJF 45        | 10 | 6        | 3/8"   | 413,0            | 11/16" - 16 UN  | 69,0    | 16,0    | 22 |
| PN 10 AJF 45 L11    | 10 | 6        | 3/8"   | 413,0            | 11/16" - 16 UN  | 69,0    | 11,0    | 22 |
| PN 10 AJF 13 45     | 10 | 6        | 3/8"   | 413,0            | 13/16" - 16 UN  | 69,5    | 16,5    | 24 |
| PN 13 AJF 10 45 L13 | 12 | 8        | 1/2"   | 413,0            | 11/16" - 16 UN  | 78,0    | 13,0    | 22 |
| PN 13 AJF 45        | 12 | 8        | 1/2"   | 413,0            | 13/16" - 16 UN  | 78,0    | 17,0    | 24 |
| PN 13 AJF 45 L15    | 12 | 8        | 1/2"   | 413,0            | 13/16" - 16 UN  | 78,0    | 15,0    | 24 |
| PN 13 AJF 16 45     | 12 | 8        | 1/2"   | 413,0            | 1" -14 UNS      | 80,5    | 19,5    | 30 |
| PN 16 AJF 45        | 16 | 10       | 5/8"   | 413,0            | 1" -14 UNS      | 93,5    | 22,5    | 30 |
| PN 16 AJF 45 L16    | 16 | 10       | 5/8"   | 413,0            | 1" -14 UNS      | 93,5    | 16,0    | 30 |
| PN 20 AJF 16 45 L21 | 19 | 12       | 3/4"   | 413,0            | 1" -14 UNS      | 104,0   | 21,0    | 30 |
| PN 20 AJF 45        | 19 | 12       | 3/4"   | 413,0            | 1,3/16" -12 UN  | 104,0   | 25,0    | 36 |
| PN 20 AJF 45 L21    | 19 | 12       | 3/4"   | 413,0            | 1,3/16" -12 UN  | 104,0   | 21,0    | 36 |
| PN 20 AJF 25 45 L21 | 19 | 12       | 3/4"   | 413,0            | 1,7/16" -12 UN  | 104,0   | 21,0    | 36 |
| PN 25 AJF 45        | 25 | 16       | 1"     | 413,0            | 1,7/16" -12 UN  | 130,5   | 27,5    | 41 |
| PN 25 AJF 45 L24    | 25 | 16       | 1"     | 413,0            | 1,7/16" -12 UN  | 130,5   | 24,0    | 41 |
| PN 32 AJF 45        | 31 | 20       | 1.1/4" | 275,0            | 1.11/16" -12 UN | 155,0   | 34,0    | 50 |
| PN 40 AJF 45        | 38 | 24       | 1.1/2" | 275,0            | 2" -12 UN       | 177,0   | 38,0    | 60 |