


PN AR VA

Pritisna nazuvica, DKR plosnata

HANSA FLEX

Karakteristike

Područje primjene	Pritisna nazuvica za HD 100- do HD 400-, KP-, TE crijeva
Priključak 1	BSP navoji matice
Oblik brtve 1	plosnato brtvljenje
Kratika	DKR ravni
Materijal	Oplemenjeni čelik

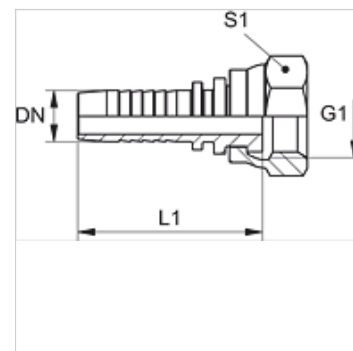

Napomena

Odgovarajući podnožak molimo da odaberete prema tipu crijeva.

Artikli

Naziv	DN	Veličina	Col	Radni tlak (bar)	G1	S1
PN 06 AR 02 VA	6	4	1/4"	350,0	G 1/8" - 28	14
PN 06 AR 10 VA	6	4	1/4"	-	G 3/8" - 19	19
PN 06 AR 13 VA	6	4	1/4"	315,0	G 1/2" -14	27
PN 06 AR VA	6	4	1/4"	350,0	G 1/4" - 19	17
PN 08 AR 10 VA	8	5	5/16"	350,0	G 3/8" - 19	19
PN 08 AR 13 VA	8	5	5/16"	315,0	G 1/2" -14	27
PN 10 AR 06 VA	10	6	3/8"	350,0	G 1/4" - 19	19
PN 10 AR 13 VA	10	6	3/8"	315,0	G 1/2" -14	27
PN 10 AR VA	10	6	3/8"	350,0	G 3/8" - 19	19
PN 13 AR 10 VA	12	8	1/2"	315,0	G 3/8" - 19	19
PN 13 AR 16 VA	12	8	1/2"	315,0	G 5/8" -14	27
PN 13 AR 20 VA	12	8	1/2"	250,0	G 3/4" -14	32
PN 13 AR VA	12	8	1/2"	315,0	G 1/2" -14	27
PN 16 AR 20 VA	16	10	5/8"	250,0	G 3/4" -14	32
PN 16 AR VA	16	10	5/8"	315,0	G 5/8" -14	27
PN 20 AR 25 VA	19	12	3/4"	200,0	G 1" -11	41
PN 20 AR 32 VA	19	12	3/4"	160,0	G 1,1/4" - 11	50
PN 20 AR VA	19	12	3/4"	250,0	G 3/4" -14	32
PN 25 AR 32 VA	25	16	1"	60,0	G 1,1/4" - 11	50
PN 25 AR VA	25	16	1"	200,0	G 1" -11	41
PN 32 AR 40 VA	31	20	1.1/4"	125,0	G 1,1/2" - 11	55
PN 32 AR VA	31	20	1.1/4"	160,0	G 1,1/4" - 11	50
PN 40 AR VA	38	24	1.1/2"	125,0	G 1,1/2" - 11	55
PN 50 AR VA	51	32	2"	80,0	G 2" -11	70

Varijante proizvoda

PN AR Pritisna nazuvica, DKR plosnata, Čelik