


PN FS VA

Pritisna nazuvica, BES

Karakteristike

Područje primjene	Pritisna nazuvica za HD 100- do HD 400-, KP-, TE cijeva
Priključak 1	Nastavci cijevi
Oblik brtve 1	Spoj za narezni prsten
Kratice	BES
Norma	ISO 8434-1
Serijska	teška
Materijal	Oplemenjeni čelik

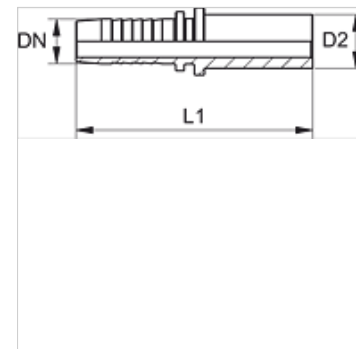

Napomena

Narezni prsten potrebno je završno montirati na kaljenom nastavku za predmontažu (VOM...).

Odgovarajući podnožak molimo da odaberete prema tipu cijeva.

Ne koristiti kod novih konstrukcija; preporučujemo: PN...AOS...VA.

Artikli

Naziv	DN	Veličina	Col	Radni tlak (bar)	D2 (mm)	L1 (mm)
PN 06 FS 03 VA	6	4	1/4"	630,0	6,0	58,3
PN 06 FS 04 VA	6	4	1/4"	630,0	8,0	60,8
PN 06 FS VA	6	4	1/4"	630,0	10,0	63,3
PN 06 FS 08 VA	6	4	1/4"	630,0	12,0	65,3
PN 08 FS 04 VA	8	5	5/16"	630,0	8,0	60,8
PN 08 FS 06 VA	8	5	5/16"	630,0	10,0	61,3
PN 08 FS VA	8	5	5/16"	630,0	12,0	65,3
PN 10 FS 06 VA	10	6	3/8"	630,0	10,0	63,8
PN 10 FS 08 VA	10	6	3/8"	630,0	12,0	63,8
PN 10 FS VA	10	6	3/8"	630,0	14,0	65,3
PN 13 FS 08 VA	12	8	1/2"	400,0	12,0	65,8
PN 13 FS VA	12	8	1/2"	400,0	16,0	70,3
PN 13 FS 16 VA	12	8	1/2"	400,0	20,0	73,8
PN 16 FS VA	16	10	5/8"	400,0	20,0	79,0
PN 20 FS 16 VA	19	12	3/4"	400,0	20,0	80,0
PN 20 FS VA	19	12	3/4"	400,0	25,0	88,0
PN 25 FS 20 VA	25	16	1"	250,0	25,0	88,5
PN 25 FS VA	25	16	1"	250,0	30,0	98,5
PN 32 FS VA	31	20	1.1/4"	250,0	38,0	124,0

Varijante proizvoda

PN FS	Pritisna nazuvica, BES, Čelik
-------	-------------------------------