

# SIN HL

Pritisna nazuvica, CEL

**HANSA FLEX**

## Karakteristike

**Priključak 1** metrički vanjski navoji, cilindrični


**Oblik brtve 1** 24° unutarnji konus

**Kratika** CEL

**Norma** DIN 3861  
DIN ISO 12151-2

**Materijal** Čelik

**Površinska zaštita** galvanski premaz

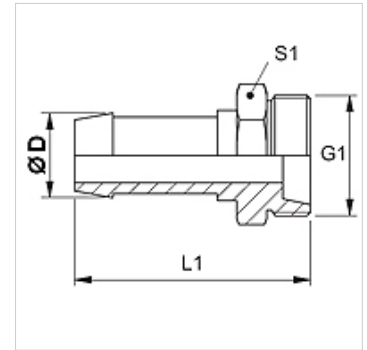

## Napomena

Odgovarajući podnožak molimo da odaberete prema tipu crijeva.

## Artikl

| Naziv        | DN | Veličina | Col   | Ø D (mm) | G1         | za vanjski Ø cijevi (mm) |
|--------------|----|----------|-------|----------|------------|--------------------------|
| SIN 03 HL    | 3  | 2        | 1/8"  | 5,0      | M 10 x 1   | 5                        |
| SIN 04 HL    | 4  | 3        | 3/16" | 6,0      | M 12 x 1,5 | 6                        |
| SIN 06 HL    | 6  | 4        | 1/4"  | 8,0      | M 14 x 1,5 | 8                        |
| SIN 08 HL    | 8  | 5        | 5/16" | 10,0     | M 16 x 1,5 | 10                       |
| SIN 10 HL    | 10 | 6        | 3/8"  | 12,0     | M 18 x 1,5 | 12                       |
| SIN 13 HL    | 12 | 8        | 1/2"  | 15,0     | M 22 x 1,5 | 15                       |
| SIN 13 HL 16 | 12 | 8        | 1/2"  | 15,0     | M 26 x 1,5 | 18                       |
| SIN 16 HL    | 16 | 10       | 5/8"  | 18,0     | M 26 x 1,5 | 18                       |