


TRN FL / TRN FS

Vijčana nazuvica, BEL / BES

HANSA FLEX

Karakteristike

| | |
|--------------------|------------------------|
| Priključak 1 | Nastavci cijevi |
| Oblik brtve 1 | Spoj za narezni prsten |
| Kratika | BEL |
| Norma | ISO 8434-1 |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

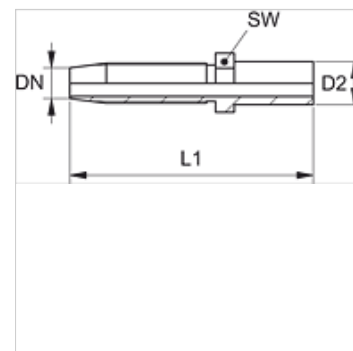

Napomena

Odgovarajući podnožak molimo da odaberete prema tipu crijeva.

Narezni prsten potrebno je završno montirati na kaljenom nastavku za predmontažu (VOM...).

Artikli

| Naziv | DN | Veličina | Col | Seriya | D2 (mm) | L1 (mm) | SW (mm) |
|--------------|----|----------|-------|--------|------------|------------|------------|
| TRN 04 FL | 5 | 3 | 3/16" | L | 6,0 | 49,5 | 10 |
| TRN 06 FL | 6 | 4 | 1/4" | L | 8,0 | 67,5 | 12 |
| TRN 08 FL | 8 | 5 | 5/16" | L | 10,0 | 72,0 | 12 |
| TRN 10 FL | 10 | 6 | 3/8" | L | 12,0 | 79,5 | 14 |
| TRN 10 FL 13 | 10 | 6 | 3/8" | L | 15,0 | 79,5 | 17 |
| TRN 13 FL | 12 | 8 | 1/2" | L | 15,0 | 86,0 | 17 |
| TRN 13 FL 16 | 12 | 8 | 1/2" | L | 18,0 | 86,0 | 19 |
| TRN 20 FL | 19 | 10 | 5/8" | L | 22,0 | 96,0 | 27 |
| TRN 04 FS | 5 | 3 | 3/16" | S | 8,0 | 51,5 | 10 |
| TRN 06 FS 04 | 6 | 4 | 1/4" | S | 8,0 | 67,5 | 12 |
| TRN 06 FS | 6 | 4 | 1/4" | S | 10,0 | 69,5 | 12 |
| TRN 06 FS 08 | 6 | 4 | 1/4" | S | 12,0 | 69,5 | 14 |
| TRN 08 FS | 8 | 5 | 5/16" | S | 12,0 | 72,0 | 14 |
| TRN 20 FS | 19 | 12 | 3/4" | S | 25,0 | 105,0 | 27 |

Dodatni elementi

VOM Nastavci za predmontažu