


TRN FL / TRN FS

Vijčana nazuvica, BEL / BES

HANSA FLEX

Karakteristike

Priključak 1	Nastavci cijevi
Oblik brtve 1	Spoj za narezni prsten
Kratika	BEL
Norma	ISO 8434-1
Materijal	Čelik
Površinska zaštita	galvanski premaz

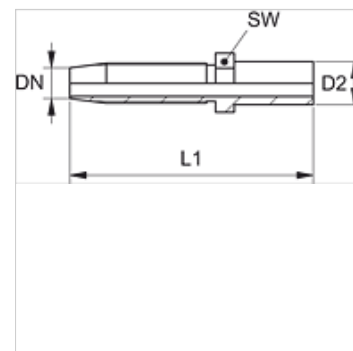

Napomena

Odgovarajući podnožak molimo da odaberete prema tipu crijeva.

Narezni prsten potrebno je završno montirati na kaljenom nastavku za predmontažu (VOM...).

Artikli

Naziv	DN	Veličina	Col	Seriya	D2 (mm)	L1 (mm)	SW (mm)
TRN 04 FL	5	3	3/16"	L	6,0	49,5	10
TRN 06 FL	6	4	1/4"	L	8,0	67,5	12
TRN 08 FL	8	5	5/16"	L	10,0	72,0	12
TRN 10 FL	10	6	3/8"	L	12,0	79,5	14
TRN 10 FL 13	10	6	3/8"	L	15,0	79,5	17
TRN 13 FL	12	8	1/2"	L	15,0	86,0	17
TRN 13 FL 16	12	8	1/2"	L	18,0	86,0	19
TRN 20 FL	19	10	5/8"	L	22,0	96,0	27
TRN 04 FS	5	3	3/16"	S	8,0	51,5	10
TRN 06 FS 04	6	4	1/4"	S	8,0	67,5	12
TRN 06 FS	6	4	1/4"	S	10,0	69,5	12
TRN 06 FS 08	6	4	1/4"	S	12,0	69,5	14
TRN 08 FS	8	5	5/16"	S	12,0	72,0	14
TRN 20 FS	19	12	3/4"	S	25,0	105,0	27

Dodatni elementi

VOM Nastavci za predmontažu