


TRP FL

Pritisna armatura, BEL

HANSA FLEX

Karakteristike

| | |
|--------------------|---------------------------------------|
| Priključak 1 | Nastavci cijevi |
| Oblik brtve 1 | Spoj za narezni prsten |
| Kratika | BEL |
| Norma | ISO 8434-1 |
| Opseg isporuke | Pritisna nazuvica + pritisni podnožak |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

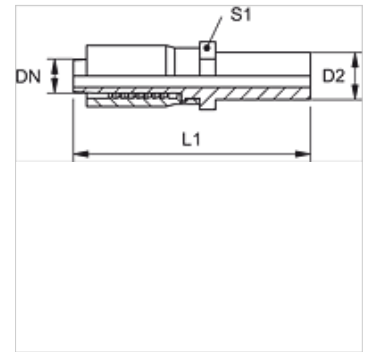

Napomena

Narezni prsten potrebno je završno montirati na kaljenom nastavku za predmontažu (VOM...).

Artikli

| Naziv | DN | Veličina | Col | Seriya | D2 (mm) | L1 (mm) | SW (mm) |
|--------------|----|----------|-------|--------|------------|------------|------------|
| TRP 04 FL | 5 | 3 | 3/16" | L | 6,0 | 57,0 | 10 |
| TRP 10 FL 13 | 10 | 6 | 3/8" | L | 15,0 | 77,0 | 19 |
| TRP 13 FL | 12 | 8 | 1/2" | L | 15,0 | 83,0 | 24 |
| TRP 13 FL 16 | 12 | 8 | 1/2" | L | 18,0 | 83,0 | 24 |

Dodatni elementi

| | |
|-----|-------------------------|
| VOM | Nastavci za predmontažu |
|-----|-------------------------|