


TRP HB

Pritisna armatura, AGR

HANSA FLEX

Karakteristike

| | |
|---------------------------|---------------------------------------|
| Priključak 1 | BSP vanjski navoj, cilindrični |
| Oblik brtve 1 | 60° unutarnji konus |
| Kratice | AGR |
| Norma | ISO 8434-6 BS 5200 |
| Opseg isporuke | Pritisna nazuvica + pritisni podnožak |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

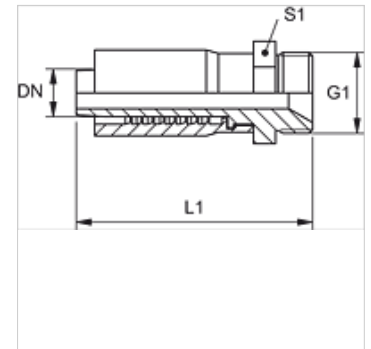

Artikli

| Naziv | DN | Veličina | Col | G1 | L1 (mm) | S1 |
|--------------|----|----------|-------|-------------|------------|----|
| TRP 04 HB 02 | 5 | 3 | 3/16" | G 1/8" - 28 | 49,0 | 14 |
| TRP 13 HB | 12 | 8 | 1/2" | G 1/2" - 14 | 73,0 | 24 |