


T HB AB

Uvrtni nastavak, T oblik

HANSA FLEX

Karakteristike

| | |
|---------------------------|--------------------------------|
| Priključak 1 | BSP vanjski navoj, cilindrični |
| Oblik brtve 1 | 60° unutarnji konus |
| Priključak 2 + 3 | BSP navoji matice |
| Oblik brtve 2 + 3 | 60° vanjski konus |
| Izvedba | Uvrtni nastavci |
| Oblik izrade | T oblik |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

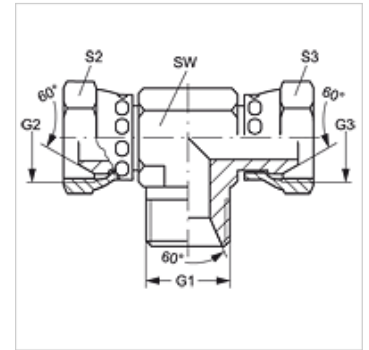

Artikli

| Naziv | G1 | G2 + G3 | SW (mm) | S2 + S3 |
|-------------------|-------------|-------------|------------|---------|
| T HB 04 AB | G 1/4" - 19 | G 1/4" - 19 | 14 | 19 |
| T HB 06 AB | G 3/8" - 19 | G 3/8" - 19 | 19 | 22 |
| T HB 08 AB | G 1/2" - 14 | G 1/2" - 14 | 22 | 27 |
| T HB 12 AB | G 3/4" - 14 | G 3/4" - 14 | 27 | 32 |
| T HB 16 AB | G 1" - 11 | G 1" - 11 | 33 | 41 |

SW, S1, S2 = širina klučca