


T HRO HB

Uvrtni nastavak, T oblik

Karakteristike

| | |
|---------------------------|------------------------------------|
| Priključak 1 | BSP vanjski navoj, cilindrični |
| Oblik brtve 1 | G oblik |
| Priključak 2 + 3 | BSP vanjski navoj, cilindrični |
| Oblik brtve 2 + 3 | 60° unutarnji konus |
| Izvedba | Uvrtni nastavak, podesiv po smjeru |
| Oblik izrade | T oblik |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

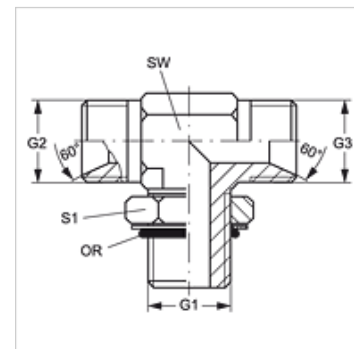

Artikli

| Naziv | G1 | G2 + G3 | SW (mm) | S1 | OR |
|----------------|---------------|---------------|------------|----|--------------|
| T HRO 02 HB | G 1/8" - 28 | G 1/8" - 28 | 11 | 16 | 7,65 x 1,78 |
| T HRO 04 HB 02 | G 1/4" - 19 | G 1/8" - 28 | 14 | 20 | 10,78 x 2,62 |
| T HRO 04 HB | G 1/4" - 19 | G 1/4" - 19 | 19 | 20 | 10,78 x 2,62 |
| T HRO 04 HB 06 | G 1/4" - 19 | G 3/8" - 19 | 14 | 20 | 10,78 x 2,62 |
| T HRO 06 HB 04 | G 3/8" - 19 | G 1/4" - 19 | 19 | 24 | 13,94 x 2,62 |
| T HRO 06 HB | G 3/8" - 19 | G 3/8" - 19 | 19 | 24 | 13,94 x 2,62 |
| T HRO 06 HB 08 | G 3/8" - 19 | G 1/2" -14 | 19 | 24 | 13,94 x 2,62 |
| T HRO 08 HB 06 | G 1/2" -14 | G 3/8" - 19 | 22 | 28 | 17,86 x 2,62 |
| T HRO 08 HB | G 1/2" -14 | G 1/2" -14 | 22 | 28 | 17,86 x 2,62 |
| T HRO 08 HB 10 | G 1/2" -14 | G 5/8" -14 | 22 | 28 | 17,86 x 2,62 |
| T HRO 08 HB 12 | G 1/2" -14 | G 3/4" -14 | 27 | 28 | 17,86 x 2,62 |
| T HRO 12 HB 08 | G 3/4" -14 | G 1/2" -14 | 27 | 35 | 23,47 x 2,62 |
| T HRO 12 HB | G 3/4" -14 | G 3/4" -14 | 27 | 35 | 23,47 x 2,62 |
| T HRO 12 HB 16 | G 3/4" -14 | G 1" -11 | 33 | 35 | 23,47 x 2,62 |
| T HRO 16 HB 12 | G 1" -11 | G 3/4" -14 | 33 | 43 | 29,74 x 3,53 |
| T HRO 16 HB | G 1" -11 | G 1" -11 | 33 | 43 | 29,74 x 3,53 |
| T HRO 20 HB 16 | G 1,1/4" - 11 | G 1" -11 | 41 | 52 | 37,69 x 3,53 |
| T HRO 20 HB | G 1,1/4" - 11 | G 1,1/4" - 11 | 41 | 52 | 37,69 x 3,53 |
| T HRO 24 HB | G 1,1/2" - 11 | G 1,1/2" - 11 | 50 | 58 | 44,04 x 3,53 |

SW, S1, S2 = širina kluča