


# T HROK HB

## Uvrtni nastavak, T oblik

### Karakteristike

<b>Priključak 1</b>	BSP vanjski navoj, cilindrični
<b>Oblik brtve 1</b>	Navojni nastavak s O prstenom + komorni prsten
<b>Priključak 2 + 3</b>	BSP vanjski navoj, cilindrični
<b>Oblik brtve 2 + 3</b>	60° unutarnji konus
<b>Izvedba</b>	Uvrtni nastavak, podesiv po smjeru
<b>Oblik izrade</b>	T oblik
<b>Materijal</b>	Čelik
<b>Površinska zaštita</b>	galvanski premaz

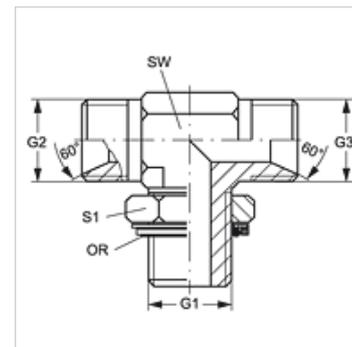

### Artikli

Naziv	G1	G2 + G3	SW (mm)	S1	OR
T HROK 02 HB	G 1/8" - 28	G 1/8" - 28	14	14	7,65 x 1,78
T HROK 04 HB 02	G 1/4" - 19	G 1/8" - 28	14	19	10,78 x 2,62
T HROK 04 HB	G 1/4" - 19	G 1/4" - 19	19	19	10,78 x 2,62
T HROK 04 HB 06	G 1/4" - 19	G 3/8" - 19	19	19	10,78 x 2,62
T HROK 06 HB 04	G 3/8" - 19	G 1/4" - 19	19	22	13,94 x 2,62
T HROK 06 HB	G 3/8" - 19	G 3/8" - 19	19	22	13,94 x 2,62
T HROK 06 HB 08	G 3/8" - 19	G 1/2" -14	19	22	13,94 x 2,62
T HROK 08 HB 06	G 1/2" -14	G 3/8" - 19	27	27	17,86 x 2,62
T HROK 08 HB	G 1/2" -14	G 1/2" -14	27	27	17,86 x 2,62
T HROK 08 HB 10	G 1/2" -14	G 5/8" -14	27	27	17,86 x 2,62
T HROK 08 HB 12	G 1/2" -14	G 3/4" -14	30	27	17,86 x 2,62
T HROK 12 HB 08	G 3/4" -14	G 1/2" -14	30	36	23,47 x 2,62
T HROK 12 HB	G 3/4" -14	G 3/4" -14	30	36	23,47 x 2,62
T HROK 12 HB 16	G 3/4" -14	G 1" -11	36	36	23,47 x 2,62
T HROK 16 HB 12	G 1" -11	G 3/4" -14	36	41	29,74 x 3,53
T HROK 16 HB	G 1" -11	G 1" -11	36	41	29,74 x 3,53
T HROK 20 HB 16	G 1,1/4" - 11	G 1" -11	41	50	37,69 x 3,53
T HROK 20 HB	G 1,1/4" - 11	G 1,1/4" - 11	51	50	37,69 x 3,53
T HROK 24 HB	G 1,1/2" - 11	G 1,1/2" - 11	50	55	44,04 x 3,53

SW, S1, S2 = širina kijuča

### Rezervni dijelovi

**KAMMRING G** Komorni prsten, colni