


HK AGRL

Nepovratni ventil za nadogradnju na ploču Cetop P

HANSA FLEX

Karakteristike

| | |
|-------------------|-----------------|
| Izvedba | predupravljan |
| Materijal | Čelik |
| Radni tlak | maks. 315 bara |
| Volumenska struja | maks. 500 l/min |
| Priključak | ISO/Cetop P |

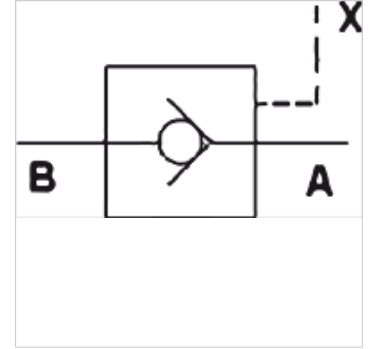

Napomena

Mounting: 4 No. Allen screws M10x45 for HK AGRL 10 / 20; 4 No. Allen screws M10x100 for HK AGRL 32

Artikli

| Naziv | Protok max. (L/min) | Odnos tlaka predupravljanja | Izvedba | Težina (kg) |
|------------|------------------------|-----------------------------|---------------|----------------|
| HK AGRL 10 | 160 | 2,5 | ISO/Cetop 06P | 4,0 |
| HK AGRL 20 | 300 | 2,1 | ISO/Cetop 08P | 7,0 |
| HK AGRL 32 | 500 | 2,55 | ISO/Cetop 10P | 14,8 |

Pribor

| | |
|--------------|---|
| HK BA AGRL | Dogradna ploča za nepovratni ventil AGRL |
| HK M HK AGRL | Set vijaka za nepovratni ventil tip HK AGRL |