


## Karakteristike

<b>Priključak</b>	Priključci za ulje straga: A + B = G 3/8"; Ulje curenja = G 1/4"
<b>Izvedba</b>	Standardna varijanta Type "C" with standard seal Vratilo Ø 16mm
<b>Ulazni i povratni tlak s vodom za curenje ulja max.</b>	140 bar

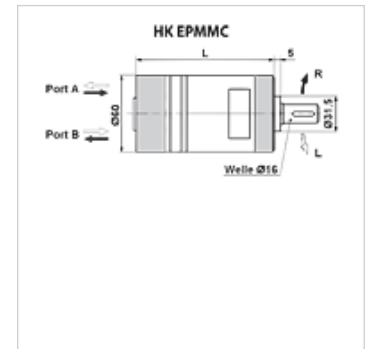

## Napomena

Preporučuje se opće priključivanje voda za curenje ulja!

## Artikli

Naziv	Protok max. (L/min)	Volumen trošenja (cc)	Broj okretaja min. (rpm)	Broj okretaja max. (rpm)	Okretni moment max. (N-m)	Pad tlaka max. (bar)	Pmax. at 0-100 rpm (bar)	Pmax. at 100-300 rpm (bar)	Pmax. at 300-600 rpm (bar)	Pmax. at 600 rpm (bar)	L (mm)	Težina (kg)
<b>HK EPMM 008 C</b>	16	8,2	50	1950	11	100	140	100	40	20	104	1,9
<b>HK EPMM 012 C</b>	20	12,9	40	1550	16	100	140	100	40	20	106	2,0
<b>HK EPMM 020 C</b>	20	20,0	30	1000	25	100	140	100	40	20	109	2,1
<b>HK EPMM 032 C</b>	20	31,8	30	630	40	100	140	100	40	-	114	2,2
<b>HK EPMM 040 C</b>	20	40,0	25	500	41	80	140	100	40	-	118	2,3
<b>HK EPMM 050 C</b>	20	50,0	20	400	45	70	140	100	-	-	122	2,4

max. pressure on shaft seal (without leak oil line) or pressure in leak oil line – Vrijednosti za okretni moment i padove tlaka vrijede za trajni pogon

## Pribor

**HK EPMM F** Prirubnica za Gerotor motor

## Rezervni dijelovi

**HK EP DS** Brtveni set za hidraulični planetarni motor