

HK TSD G


Zaporni poklopac / šipka za mjerenje razine ulja

HANSA FLEX

Karakteristike

Izvedba sa/bez šipke za mjerenje ulja
s ventilacijskim filtrom, čelik 90 µm

Materijal Plastika / čelik
Brtva: NBR

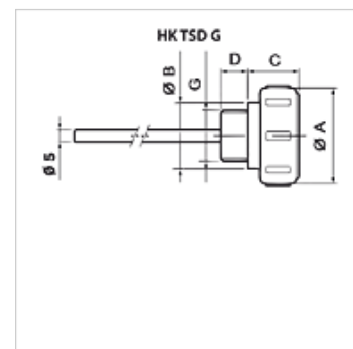

Artikli

Naziv	G	Ø A (mm)	Ø B (mm)	C (mm)	D (mm)	Duljina mjerne šipke	Natpis	Težina (kg)
HK TSD G16 RNAAS	G 3/8"	35	23	21	10	-	-	0,05
HK TSD G16 ROAAA	G 3/8"	35	23	21	10	210 mm	OIL	0,05
HK TSD G20 RNAAS	G 1/2"	39	27	21	11	-	-	0,05
HK TSD G20 ROAAS	G 1/2"	39	27	21	11	-	OIL	0,05
HK TSD G20 RNAA 200	G 1/2"	39	27	21	11	210 mm	-	0,06
HK TSD G26 ROAAA	G 3/4"	45	33	21	12	210 mm	OIL	0,07
HK TSD G26 ROAAS	G 3/4"	45	33	21	12	-	OIL	0,05
HK TSD G33 RNAAS	G 1"	51	39	24	13	-	-	0,05
HK TSD G33 ROAAS	G 1"	51	39	24	13	-	OIL	0,05