


HK V7 867

8/3-smjerni preklopni ventil

HANSA FLEX

Karakteristike

| | |
|------------------|---|
| Izvedba | Tip A - srednji položaj otvoreno Tip C - srednji položaj zatvoreno |
| Materijal | Kućište: lijevano željeno, unutarnji dijelovi od čelika |

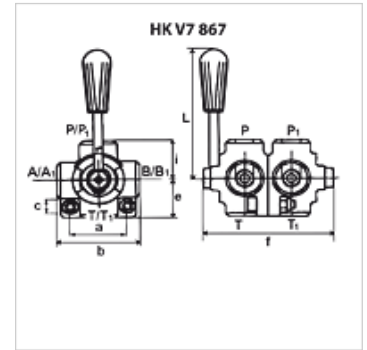

Napomena

Rotary slide valves can be pressurised from all sides and are designed to have less internal leakage

Artikli

| Naziv | Tlak max. (bar) | Priključci | Q max. (L/min) | a (mm) | b (mm) | c (mm) | e (mm) | f (mm) | i (mm) | L (mm) | Težina (kg) |
|---------------|--------------------|------------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------------|
| HK V7 867 A06 | 250 | 3/8" | 35 | 54 | 77 | 8,5 | 38,5 | 142 | 38,5 | 110 | 2,5 |
| HK V7 867 A08 | 250 | 1/2" | 50 | 68 | 90 | 8,5 | 45,0 | 160 | 45,0 | 120 | 3,8 |
| HK V7 867 A12 | 220 | 3/4" | 90 | 74 | 95 | 8,5 | 47,5 | 180 | 47,5 | 125 | 5,2 |
| HK V7 867 C06 | 250 | 3/8" | 35 | 54 | 77 | 8,5 | 38,5 | 142 | 38,5 | 110 | 2,5 |
| HK V7 867 C08 | 250 | 1/2" | 50 | 68 | 90 | 8,5 | 45,0 | 160 | 45,0 | 120 | 3,8 |
| HK V7 867 C12 | 220 | 3/4" | 90 | 74 | 95 | 8,5 | 47,5 | 180 | 47,5 | 125 | 5,2 |