


Karakteristike

| | |
|-----------------------------|---------------------------------|
| Izvedba | Pokrivna manšeta |
| Radni tlak | do 500 bara |
| Brzina klizanja max. | 0,5 m/s |
| Temperatura min. | -30 °C |
| Temperatura max. | 110 °C |
| Mediji | Mineralna ulja Emulzije vode |
| Montaža | na višedijelnim klipovima |
| Primjena | Hidraulika |

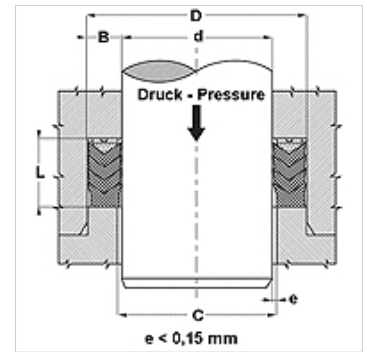

Artikli

| Naziv | d (mm) | D (mm) | L (mm) |
|------------------|-----------|-----------|-----------|
| CH-375 325-NEO | 82,55 | 95,25 | 21,72 |
| CH-425 350-NEO | 88,90 | 107,95 | 31,00 |
| CH-450 350-NEO | 88,90 | 114,30 | 35,32 |
| CH-450 375-NEO | 95,25 | 114,30 | 25,40 |
| CH-450 387-NEO | 98,42 | 114,42 | 26,59 |
| CH-500 425-NEO | 107,95 | 127,00 | 30,00 |
| CH-550 450-1-NEO | 114,30 | 139,70 | 33,50 |
| CH-551 452-NEO | 115,00 | 140,00 | 37,12 |
| CH-590 472-NEO | 120,00 | 150,00 | 44,00 |
| CH-600 500-NEO | 127,00 | 152,40 | 38,63 |
| CH-629 511-1-NEO | 130,00 | 160,00 | 43,50 |
| CH-826 708-B-NEO | 180,00 | 210,00 | 32,97 |
| CH-875 750-NEO | 190,50 | 222,25 | 50,00 |
| CH-110 2984B-NEO | 250,00 | 280,00 | 32,97 |

BD = radni tlak