

# DSR UP

Dvostruki strugač, DSR-UP


**HANSA FLEX**

## Karakteristike

|                      |   |
|----------------------|---|
| Izvedba              | Strugač   |
| Brzina klizanja max. | 0,5 m/s   |
| Temperatura min.     | -30 °C  |
| Temperatura max.     | 80 °C   |
| Mediji               | Mineralna ulja  |
| Montaža              | Strugač oblikovati u obliku bubrega i utisnuti u prihvatni utor |
| Primjena             | Hidraulika  |
| Materijal            | PUR   |



| Toleranz / Tolerance |     |            |     |     |            |   |
|----------------------|-----|------------|-----|-----|------------|---|
| d                    | D   | L          | C   | F   | G          | E |
| h11                  | H11 | +0,20<br>0 | H10 | H11 | +0,20<br>0 |   |

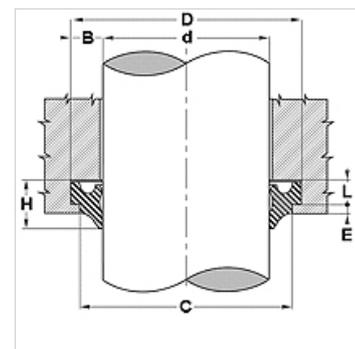

## Opis

struže i ulje koje curi s brtvenog prostora  
jednostavna montaža

## Artikli

| Naziv      | D<br>(mm) | d<br>(mm) | L<br>(mm) | C<br>(mm) | F<br>(mm) | G<br>(mm) | E<br>(mm) | H<br>(mm) |
|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| DSR 18-UP  | 26        | 18        | 4,0       | 24        | 21,5      | 6,0       | 2         | 8         |
| DSR 22-UP  | 22        | 22        | 4,0       | 28        | 25,5      | 6,0       | 2         | 8         |
| DSR 32-UP  | 40        | 32        | 4,0       | 38        | 35,5      | 6,0       | 2         | 8         |
| DSR 35-UP  | 43        | 35        | 4,0       | 41        | 38,5      | 6,0       | 2         | 8         |
| DSR 36-UP  | 44        | 36        | 4,0       | 42        | 39,5      | 6,0       | 2         | 8         |
| DSR 40-UP  | 48        | 40        | 4,0       | 46        | 43,5      | 6,0       | 2         | 8         |
| DSR 45-UP  | 53        | 45        | 4,0       | 51        | 48,5      | 6,0       | 2         | 8         |
| DSR 50-UP  | 58        | 50        | 4,0       | 56        | 53,5      | 6,0       | 2         | 8         |
| DSR 55-UP  | 63        | 55        | 4,0       | 61        | 58,5      | 6,0       | 2         | 8         |
| DSR 56-UP  | 64        | 56        | 4,0       | 62        | 59,5      | 6,0       | 2         | 8         |
| DSR 60-UP  | 68        | 60        | 4,0       | 66        | 63,5      | 6,0       | 2         | 8         |
| DSR 63-UP  | 71        | 63        | 4,0       | 69        | 66,5      | 6,0       | 2         | 8         |
| DSR 80-UP  | 88        | 80        | 4,0       | 86        | 83,5      | 6,0       | 2         | 8         |
| DSR 90-UP  | 98        | 90        | 4,0       | 96        | 93,5      | 6,0       | 2         | 8         |
| DSR 100-UP | 108       | 100       | 4,0       | 106       | 103,5     | 6,0       | 2         | 8         |