


## Karakteristike

|                             |   |
|-----------------------------|---|
| <b>Izvedba</b>              | Prsten šipke s utorom                           |
| <b>Radni tlak</b>           | do 400 bara                                     |
| <b>Brzina klizanja max.</b> | 0,5 m/s   |
| <b>Izvedba</b>              | metrički  |
| <b>Temperatura min.</b>     | -30 °C  |
| <b>Temperatura max.</b>     | 80 °C   |
| <b>Mediji</b>               | Mineralna ulja                                  |
| <b>Montaža</b>              | u zatvorenim utorima A<br>u otvorenim utorima B |
| <b>Materijal</b>            | PUR   |
| <b>Primjena</b>             | Hidraulika                                      |



| Spaltmaß / Clearance |                  |           |
|----------------------|------------------|-----------|
| Druck<br>bar         | e (mm) EU - EU-I |           |
|                      | d < 60 mm        | d > 60 mm |
| 50                   | < 0,40           | < 0,50    |
| 100                  | < 0,30           | < 0,40    |
| 200                  | < 0,20           | < 0,30    |
| 300                  | < 0,15           | < 0,20    |
| 400                  | < 0,10           | < 0,15    |

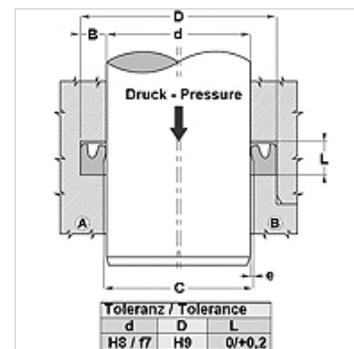

## Opis

brtva koja se ne haba.  
velika otpornost na habanje  
jednostavno rješenje.

## Napomene uz narudžbu

EU brtve promjera 20 do 510 mm možemo brzo proizvesti.

## Artikli

| Naziv      | D<br>(mm) | d<br>(mm) | L<br>(mm) | Utori prema |
|------------|-----------|-----------|-----------|-------------|
| EU 06 12-1 | 12,0      | 6         | 5,8       | -           |
| EU 06 14   | 14,0      | 6         | 6,3       | ISO 5597    |
| EU 08 14-1 | 14,4      | 8         | 10,5      | -           |
| EU 08 16   | 16,0      | 8         | 6,3       | ISO 5597    |
| EU 08 18-1 | 18,0      | 8         | 9,0       | -           |
| EU 10 18   | 18,0      | 10        | 6,3       | ISO 5597    |
| EU 10 20   | 20,0      | 10        | 8,0       | ISO 5597    |
| EU 12 17   | 17,0      | 12        | 4,0       | -           |
| EU 12 20-1 | 20,0      | 12        | 5,5       | -           |
| EU 12 20   | 20,0      | 12        | 6,3       | ISO 5597    |
| EU 12 22   | 22,0      | 12        | 8,0       | ISO 5597    |
| EU 12 22-1 | 22,0      | 12        | 9,0       | -           |
| EU 14 22   | 22,0      | 14        | 6,3       | ISO 5597    |
| EU 14 24   | 24,0      | 14        | 8,0       | -           |
| EU 15 23-1 | 23,0      | 15        | 6,3       | -           |
| EU 15 25-1 | 25,0      | 15        | 9,0       | -           |
| EU 16 21   | 20,6      | 16        | 3,6       | -           |
| EU 16 22   | 22,0      | 16        | 6,0       | -           |
| EU 16 24   | 24,0      | 16        | 6,3       | -           |
| EU 16 24-1 | 24,0      | 16        | 7,0       | -           |
| EU 16 26   | 26,0      | 16        | 8,0       | ISO 5597    |
| EU 16 26-2 | 26,0      | 16        | 10,0      | -           |
| EU 18 24   | 24,0      | 18        | 5,2       | -           |
| EU 18 24-1 | 24,0      | 18        | 6,0       | -           |
| EU 18 26-1 | 26,0      | 18        | 6,3       | ISO 5597    |
| EU 18 26   | 26,0      | 18        | 9,0       | -           |
| EU 18 28   | 28,0      | 18        | 8,0       | ISO 5597    |
| EU 18 28-1 | 28,0      | 18        | 9,0       | -           |
| EU 20 26-1 | 26,0      | 20        | 5,5       | -           |
| EU 20 28   | 28,0      | 20        | 6,3       | ISO 5597    |
| EU 20 28-1 | 28,0      | 20        | 7,0       | -           |
| EU 20 28-2 | 28,0      | 20        | 8,0       | -           |
| EU 20 30   | 30,0      | 20        | 8,0       | ISO 5597    |
| EU 20 30-2 | 30,0      | 20        | 9,0       | -           |
| EU 20 35   | 35,0      | 20        | 11,0      | -           |
| EU 22 30-1 | 30,0      | 22        | 6,3       | ISO 5597    |
| EU 22 30   | 30,0      | 22        | 9,0       | -           |



**Artikli**

| Naziv      | D<br>(mm) | d<br>(mm) | L<br>(mm) | Utori prema |
|------------|-----------|-----------|-----------|-------------|
| EU 22 32-1 | 32,0      | 22        | 8,0       | ISO 5597    |
| EU 22 32   | 32,0      | 22        | 10,0      | -           |
| EU 24 34   | 34,0      | 24        | 8,0       | -           |
| EU 24 34-1 | 34,0      | 24        | 9,5       | -           |
| EU 25 32   | 32,0      | 25        | 7,0       | -           |
| EU 25 33   | 33,0      | 25        | 6,3       | -           |
| EU 25 33-3 | 33,0      | 25        | 7,0       | -           |
| EU 25 33-1 | 33,0      | 25        | 8,0       | -           |
| EU 25 33-2 | 33,0      | 25        | 11,0      | -           |
| EU 25 35   | 35,0      | 25        | 8,0       | ISO 5597    |
| EU 25 38-1 | 38,0      | 25        | 10,0      | -           |
| EU 25 40   | 40,0      | 25        | 11,0      | -           |
| EU 28 36   | 36,0      | 28        | 6,3       | -           |
| EU 28 38   | 38,0      | 28        | 8,0       | ISO 5597    |
| EU 28 38-1 | 38,0      | 28        | 9,0       | -           |
| EU 28 38-2 | 38,0      | 28        | 11,0      | -           |
| EU 28 40   | 40,0      | 28        | 9,5       | -           |
| EU 28 43   | 43,0      | 28        | 12,5      | ISO 5597    |
| EU 30 38   | 38,0      | 30        | 6,3       | -           |
| EU 30 38-1 | 38,0      | 30        | 9,0       | -           |
| EU 30 40-3 | 40,0      | 30        | 6,3       | -           |
| EU 30 40   | 40,0      | 30        | 8,0       | -           |
| EU 30 40-1 | 40,0      | 30        | 11,0      | -           |
| EU 30 43   | 43,0      | 30        | 10,0      | -           |
| EU 30 45-1 | 45,0      | 30        | 9,0       | -           |
| EU 32 40-1 | 40,0      | 32        | 6,3       | -           |
| EU 32 40   | 40,0      | 32        | 9,0       | -           |
| EU 32 42   | 42,0      | 32        | 8,0       | ISO 5597    |
| EU 32 42-1 | 42,0      | 32        | 11,0      | -           |
| EU 32 45   | 45,0      | 32        | 11,0      | -           |
| EU 33 43-1 | 43,0      | 33        | 11,0      | -           |
| EU 32 47-1 | 47,0      | 32        | 11,0      | -           |
| EU 35 43   | 43,0      | 35        | 6,3       | -           |
| EU 35 43-1 | 43,0      | 35        | 9,0       | -           |
| EU 35 45   | 45,0      | 35        | 8,0       | -           |
| EU 35 45-1 | 45,0      | 35        | 11,0      | -           |
| EU 35 45-2 | 45,0      | 35        | 13,5      | -           |
| EU 35 46   | 46,0      | 35        | 9,0       | -           |
| EU 35 46-1 | 46,0      | 35        | 10,0      | -           |
| EU 35 47   | 47,0      | 35        | 9,0       | -           |
| EU 35 50   | 50,0      | 35        | 11,0      | -           |
| EU 36 44   | 44,0      | 36        | 9,0       | -           |
| EU 36 46   | 46,0      | 36        | 8,0       | ISO 5597    |
| EU 36 46-1 | 46,0      | 36        | 11,0      | -           |
| EU 36 48-1 | 48,0      | 36        | 8,0       | -           |
| EU 36 48   | 48,0      | 36        | 9,0       | -           |
| EU 36 51   | 51,0      | 36        | 11,0      | -           |
| EU 36 51-1 | 51,0      | 36        | 12,5      | ISO 5597    |
| EU 37 45   | 45,0      | 37        | 6,3       | -           |
| EU 38 44   | 44,0      | 38        | 5,3       | -           |
| EU 38 45   | 45,0      | 38        | 5,5       | -           |
| EU 38 45-1 | 45,0      | 38        | 7,0       | -           |
| EU 39 50   | 50,0      | 39        | 11,0      | -           |
| EU 40 48   | 48,0      | 40        | 6,3       | -           |
| EU 40 48-1 | 48,0      | 40        | 9,0       | -           |
| EU 40 50-2 | 50,0      | 40        | 8,0       | ISO 5597    |
| EU 40 50   | 50,0      | 40        | 10,0      | -           |
| EU 40 50-1 | 50,0      | 40        | 11,0      | -           |
| EU 40 50-3 | 50,0      | 40        | 13,5      | -           |
| EU 40 52   | 52,0      | 40        | 9,0       | -           |
| EU 40 55   | 55,0      | 40        | 11,0      | -           |
| EU 40 55-1 | 55,0      | 40        | 12,5      | ISO 5597    |
| EU 40 60   | 60,0      | 40        | 13,0      | -           |



| Artikli    |           |           |           |             |
|------------|-----------|-----------|-----------|-------------|
| Naziv      | D<br>(mm) | d<br>(mm) | L<br>(mm) | Utori prema |
| EU 42 62-1 | 62,0      | 42        | 11,0      | -           |
| EU 45 53   | 53,0      | 45        | 6,3       | -           |
| EU 45 53-2 | 53,0      | 45        | 11,0      | -           |
| EU 45 53-1 | 53,0      | 45        | 13,0      | -           |
| EU 45 55-1 | 55,0      | 45        | 8,0       | ISO 5597    |
| EU 45 55   | 55,0      | 45        | 11,0      | -           |
| EU 45 58-1 | 58,0      | 45        | 10,0      | -           |
| EU 45 60   | 60,0      | 45        | 11,0      | -           |
| EU 45 60-1 | 60,0      | 45        | 12,5      | ISO 5597    |
| EU 45 65-2 | 65,0      | 45        | 11,0      | -           |
| EU 45 65   | 65,0      | 45        | 13,0      | -           |
| EU 45 65-1 | 65,0      | 45        | 14,5      | -           |
| EU 46 56   | 56,0      | 46        | 8,0       | -           |
| EU 50 60-1 | 60,0      | 50        | 8,0       | -           |
| EU 50 60   | 60,0      | 50        | 11,0      | -           |
| EU 50 60-2 | 60,0      | 50        | 13,0      | -           |
| EU 50 65-1 | 65,0      | 50        | 11,0      | -           |
| EU 50 65   | 65,0      | 50        | 12,5      | ISO 5597    |
| EU 50 68-1 | 68,0      | 50        | 10,0      | -           |
| EU 50 70   | 70,0      | 50        | 13,0      | -           |
| EU 52 62   | 62,0      | 52        | 11,0      | -           |
| EU 55 63-1 | 63,0      | 55        | 13,0      | -           |
| EU 55 65   | 65,0      | 55        | 8,0       | -           |
| EU 55 65-1 | 65,0      | 55        | 11,0      | -           |
| EU 55 65-2 | 65,0      | 55        | 13,0      | -           |
| EU 55 65-3 | 65,0      | 55        | 14,5      | -           |
| EU 55 67-1 | 67,0      | 55        | 11,0      | -           |
| EU 55 68   | 68,0      | 55        | 11,0      | -           |
| EU 55 70   | 70,0      | 55        | 11,0      | -           |
| EU 55 70-1 | 70,0      | 55        | 13,0      | -           |
| EU 55 75   | 75,0      | 55        | 13,0      | -           |
| EU 55 75-1 | 75,0      | 55        | 14,5      | -           |
| EU 56 66   | 66,0      | 56        | 11,0      | -           |
| EU 56 71   | 71,0      | 56        | 11,0      | -           |
| EU 56 71-1 | 71,0      | 56        | 12,5      | -           |
| EU 56 76   | 76,0      | 56        | 13,0      | -           |
| EU 56 76-1 | 76,0      | 56        | 14,5      | -           |
| EU 56 76-2 | 76,0      | 56        | 16,0      | ISO 5597    |
| EU 60 70-1 | 70,0      | 60        | 8,0       | -           |
| EU 60 70   | 70,0      | 60        | 11,0      | -           |
| EU 60 70-S | 70,0      | 60        | 15,0      | -           |
| EU 60 72   | 72,0      | 60        | 9,0       | -           |
| EU 60 72-1 | 72,0      | 60        | 10,0      | -           |
| EU 60 75   | 75,0      | 60        | 11,0      | -           |
| EU 60 75-1 | 75,0      | 60        | 13,0      | -           |
| EU 60 77   | 77,0      | 60        | 12,0      | -           |
| EU 60 80   | 80,0      | 60        | 13,0      | -           |
| EU 61 69-1 | 69,0      | 61        | 8,5       | -           |
| EU 62 74-1 | 74,0      | 62        | 14,0      | -           |
| EU 63 73-1 | 73,0      | 63        | 11,0      | -           |
| EU 63 73   | 73,0      | 63        | 13,0      | -           |
| EU 63 75   | 75,0      | 63        | 9,6       | -           |
| EU 63 78-1 | 78,0      | 63        | 11,0      | -           |
| EU 63 78   | 78,0      | 63        | 12,5      | ISO 5597    |
| EU 63 83-1 | 83,0      | 63        | 14,5      | -           |
| EU 63 83-2 | 83,0      | 63        | 16,0      | -           |
| EU 65 75-3 | 75,0      | 65        | 11,0      | -           |
| EU 65 77-1 | 77,0      | 65        | 10,0      | -           |
| EU 65 80   | 80,0      | 65        | 11,0      | -           |
| EU 65 80-1 | 80,0      | 65        | 13,0      | -           |
| EU 65 85   | 85,0      | 65        | 13,0      | -           |
| EU 65 85-1 | 85,0      | 65        | 14,5      | -           |
| EU 70 80-3 | 80,0      | 70        | 6,5       | -           |



| Artikli      |           |           |           |             |
|--------------|-----------|-----------|-----------|-------------|
| Naziv        | D<br>(mm) | d<br>(mm) | L<br>(mm) | Utori prema |
| EU 70 80-2   | 80,0      | 70        | 8,0       | -           |
| EU 70 80-1   | 80,0      | 70        | 11,0      | -           |
| EU 70 80     | 80,0      | 70        | 13,0      | -           |
| EU 70 85-1   | 85,0      | 70        | 11,0      | -           |
| EU 70 85     | 85,0      | 70        | 12,5      | ISO 5597    |
| EU 70 90-2   | 90,0      | 70        | 16,0      | ISO 5597    |
| EU 73 82     | 82,5      | 73        | 8,0       | -           |
| EU 75 85     | 85,0      | 75        | 8,0       | -           |
| EU 75 85-1   | 85,0      | 75        | 13,0      | -           |
| EU 75 90-1   | 90,0      | 75        | 11,0      | -           |
| EU 75 90     | 90,0      | 75        | 13,0      | -           |
| EU 75 95     | 95,0      | 75        | 13,0      | -           |
| EU 76 84-1   | 84,0      | 76        | 8,5       | -           |
| EU 78 88-S   | 88,0      | 78        | 15,0      | -           |
| EU 80 100    | 100,0     | 80        | 13,0      | -           |
| EU 80 100-2  | 100,0     | 80        | 16,0      | ISO 5597    |
| EU 80 90     | 90,0      | 80        | 8,0       | -           |
| EU 80 90-2   | 90,0      | 80        | 13,0      | -           |
| EU 80 92     | 92,0      | 80        | 9,6       | -           |
| EU 80 95-3   | 95,0      | 80        | 10,0      | -           |
| EU 80 95-2   | 95,0      | 80        | 11,0      | -           |
| EU 80 95-1   | 95,0      | 80        | 12,5      | -           |
| EU 80 95     | 95,0      | 80        | 13,0      | -           |
| EU 85 95     | 95,0      | 85        | 8,0       | -           |
| EU 85 100-1  | 100,0     | 85        | 12,0      | -           |
| EU 85 100    | 100,0     | 85        | 13,0      | -           |
| EU 85 105    | 105,0     | 85        | 13,0      | -           |
| EU 85 105-1  | 105,0     | 85        | 14,5      | -           |
| EU 90 100-1  | 100,0     | 90        | 12,5      | -           |
| EU 90 105-2  | 105,0     | 90        | 9,5       | -           |
| EU 90 105-3  | 105,0     | 90        | 12,5      | ISO 5597    |
| EU 90 105    | 105,0     | 90        | 13,0      | -           |
| EU 90 110    | 110,0     | 90        | 13,0      | -           |
| EU 90 110-1  | 110,0     | 90        | 16,0      | ISO 5597    |
| EU 91 99-1   | 99,0      | 91        | 8,5       | -           |
| EU 93 104-1  | 104,0     | 93        | 11,0      | -           |
| EU 95 105-1  | 105,0     | 95        | 11,0      | -           |
| EU 95 115    | 115,0     | 95        | 13,0      | -           |
| EU 99 109-S  | 109,0     | 99        | 15,0      | -           |
| EU 100 110-1 | 110,0     | 100       | 15,0      | -           |
| EU 100 113-1 | 113,0     | 100       | 13,5      | -           |
| EU 100 115-2 | 115,0     | 100       | 11,5      | -           |
| EU 100 115   | 115,0     | 100       | 13,0      | -           |
| EU 100 120   | 120,0     | 100       | 13,0      | -           |
| EU 100 120-2 | 120,0     | 100       | 16,0      | ISO 5597    |
| EU 100 125   | 125,0     | 100       | 20,0      | ISO 5597    |
| EU 105 115-1 | 115,0     | 105       | 11,0      | -           |
| EU 105 115-2 | 115,0     | 105       | 12,5      | -           |
| EU 105 115-3 | 115,0     | 105       | 14,5      | -           |
| EU 105 125   | 125,0     | 105       | 13,0      | -           |
| EU 110 125-1 | 125,0     | 110       | 12,0      | -           |
| EU 110 125   | 125,0     | 110       | 16,0      | -           |
| EU 110 130   | 130,0     | 110       | 13,0      | -           |
| EU 110 130-1 | 130,0     | 110       | 16,0      | ISO 5597    |
| EU 115 135   | 135,0     | 115       | 13,0      | -           |
| EU 120 130-2 | 130,0     | 120       | 12,5      | -           |
| EU 120 130-S | 130,0     | 120       | 15,0      | -           |
| EU 120 132-1 | 132,0     | 120       | 11,0      | -           |
| EU 120 135-1 | 135,0     | 120       | 12,5      | -           |
| EU 120 140   | 140,0     | 120       | 13,0      | -           |
| EU 120 140-1 | 140,0     | 120       | 16,0      | -           |
| EU 125 145   | 145,0     | 125       | 13,0      | -           |
| EU 125 145-1 | 145,0     | 125       | 16,0      | ISO 5597    |



**Artikli**

| Naziv        | D<br>(mm) | d<br>(mm) | L<br>(mm) | Utori prema |
|--------------|-----------|-----------|-----------|-------------|
| EU 125 150   | 150,0     | 125       | 15,0      | -           |
| EU 130 140   | 140,0     | 130       | 8,0       | -           |
| EU 130 145-2 | 145,0     | 130       | 15,0      | -           |
| EU 130 150   | 150,0     | 130       | 13,0      | -           |
| EU 130 150-1 | 150,0     | 130       | 16,0      | -           |
| EU 140 150-1 | 150,0     | 140       | 12,5      | -           |
| EU 140 160-2 | 160,0     | 140       | 16,0      | ISO 5597    |
| EU 140 165   | 165,0     | 140       | 20,0      | ISO 5597    |
| EU 141 151-S | 151,0     | 141       | 15,0      | -           |
| EU 150 170-1 | 170,0     | 150       | 14,5      | -           |
| EU 150 170-2 | 170,0     | 150       | 16,0      | -           |
| EU 160 180   | 180,0     | 160       | 13,0      | -           |
| EU 160 180-1 | 180,0     | 160       | 16,0      | -           |
| EU 160 185   | 185,0     | 160       | 20,0      | -           |
| EU 162 172-S | 172,0     | 162       | 15,0      | -           |
| EU 170 190-1 | 190,0     | 170       | 16,0      | -           |
| EU 180 200-1 | 200,0     | 180       | 16,0      | -           |
| EU 180 200-2 | 200,0     | 180       | 20,0      | -           |
| EU 183 193-S | 193,0     | 183       | 15,0      | -           |
| EU 190 210-1 | 210,0     | 190       | 16,0      | -           |
| EU 200 212-1 | 212,0     | 200       | 16,0      | -           |
| EU 200 220   | 220,0     | 200       | 13,0      | -           |
| EU 200 220-1 | 220,0     | 200       | 16,0      | -           |
| EU 207 217-S | 217,0     | 207       | 15,0      | -           |
| EU 210 230   | 230,0     | 210       | 13,0      | -           |
| EU 210 230-2 | 230,0     | 210       | 16,0      | -           |
| EU 210 235-1 | 235,0     | 210       | 26,0      | -           |
| EU 220 240   | 240,0     | 220       | 13,0      | -           |
| EU 220 240-1 | 240,0     | 220       | 16,0      | -           |
| EU 230 250   | 250,0     | 230       | 13,0      | -           |
| EU 230 260   | 260,0     | 230       | 25,0      | -           |
| EU 231 241-S | 241,0     | 231       | 15,0      | -           |
| EU 240 260   | 260,0     | 240       | 13,0      | -           |
| EU 240 260-1 | 260,0     | 240       | 16,0      | -           |
| EU 240 270   | 270,0     | 240       | 19,0      | -           |
| EU 250 270   | 270,0     | 250       | 13,0      | -           |
| EU 250 270-1 | 270,0     | 250       | 16,0      | -           |
| EU 280 305-1 | 305,0     | 280       | 16,0      | -           |
| EU 280 310   | 310,0     | 280       | 25,0      | -           |