


Karakteristike

| | |
|------------------------|-----------------------|
| Izvedba | Traka za vođenje |
| Brzina klizanja max. | 15,0 m/s |
| Površinsko pritiskanje | 2,5 N/mm ² |
| Temperatura min. | -100 °C |
| Temperatura max. | 200 °C |
| Mediji | Mineralna ulja |
| Montaža | umetnuti u utor |
| Materijal | PTBR |

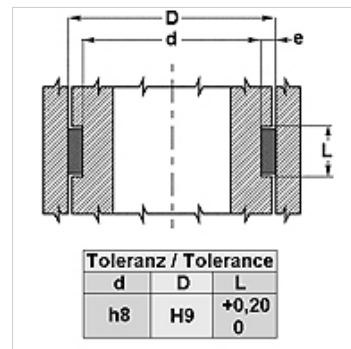

Schnittmöglichkeiten / Cutting options

**Napomena**

Izračun poprečne sile; $F = p \times D \times L \times n$

F= maksimalna poprečna sila (N)

p= Maksimalno površinsko prešanje (N/mm²)

D x L= projicirana površina (mm²)

n= broj prstena

Opis

Mogućnost dostave kao robe u metrima.

mali koeficijent trenja.

Nema "stick-slip" efekta.

jednostavna obrada i montaža ugradnog utora

Napomene uz narudžbu

Obratite nam se kod posebnim pogonskih uvjeta (tekućina, temperatura, tlak ...).

Artikli

| Naziv | e (mm) | L (mm) |
|--------------|-----------|-----------|
| GT 15 025-55 | 1,50 | 2,5 |
| GT 15 032-55 | 1,50 | 3,2 |
| GT 15 040-55 | 1,55 | 4,0 |
| GT 15 042-30 | 1,50 | 4,2 |
| GT 15 042-55 | 2,00 | 4,2 |
| GT 15 063-55 | 1,50 | 6,3 |
| GT 15 081-55 | 1,50 | 8,1 |
| GT 15 097-55 | 1,50 | 9,7 |
| GT 15 100-55 | 1,50 | 10,0 |
| GT 15 200-55 | 1,50 | 20,0 |
| GT 20 042-55 | 2,00 | 4,2 |
| GT 20 063-55 | 2,00 | 6,3 |
| GT 20 081-55 | 2,00 | 8,1 |
| GT 20 097-55 | 2,00 | 9,7 |
| GT 20 100-55 | 2,00 | 10,0 |
| GT 20 120-55 | 2,00 | 12,0 |
| GT 20 150-55 | 2,00 | 15,0 |
| GT 20 200-55 | 2,00 | 20,0 |
| GT 20 250-55 | 2,00 | 25,0 |
| GT 20 300-55 | 2,00 | 30,0 |
| GT 25 042-55 | 2,50 | 4,2 |
| GT 25 056-55 | 2,50 | 5,6 |
| GT 25 063-55 | 2,50 | 6,3 |
| GT 25 081-55 | 2,50 | 8,1 |
| GT 25 097-55 | 2,50 | 9,7 |
| GT 25 100-55 | 2,50 | 10,0 |
| GT 25 128-55 | 2,50 | 12,8 |
| GT 25 150-55 | 2,50 | 15,0 |
| GT 25 200-55 | 2,50 | 20,0 |
| GT 25 250-55 | 2,50 | 25,0 |
| GT 25 300-55 | 2,50 | 30,0 |



Artikli

| Naziv | e (mm) | L (mm) |
|--------------|-----------|-----------|
| GT 25 400-55 | 2,50 | 40,0 |
| GT 30 096-55 | 3,00 | 9,6 |
| GT 30 128-55 | 3,00 | 12,8 |
| GT 30 150-55 | 3,00 | 15,0 |
| GT 30 200-55 | 3,00 | 20,0 |
| GT 30 250-55 | 3,00 | 25,0 |
| GT 30 300-55 | 3,00 | 30,0 |
| GT 30 400-55 | 3,00 | 40,0 |
| GT 40 081-55 | 4,00 | 8,1 |
| GT 40 097-55 | 4,00 | 9,7 |
| GT 40 250-55 | 4,00 | 25,0 |
| GT 40 500-55 | 4,00 | 50,0 |