
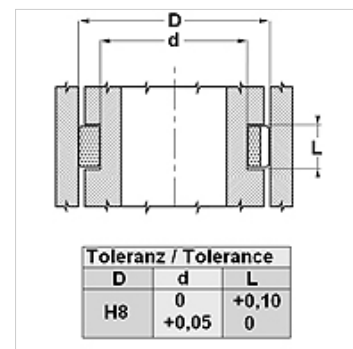


Karakteristike

Brzina klizanja max.	5,0 m/s
Površinsko pritiskanje	na 20°C 15 N/mm ² ; na 100°C 10 N/mm ³
Temperatura min.	-30 °C
Temperatura max.	110 °C
Mediji	Mineralna ulja Emulzije vode
Montaža	umetnuti u utor
Materijal	acetat smola + staklena vlakna



Napomena

Izračun poprečne sile; $F = p \times D \times L \times n$

F= maksimalna poprečna sila (N)

p= Maksimalno površinsko prešanje (N/mm²)

D x L= projicirana površina (mm²)

n= broj prstena

Opis

jednostavna obrada i montaža ugradnog utora

Visoka nosivost za plunger cilindre.

Pozor, ne može se upotrijebiti kao graničnik

Artikli

Naziv	D (mm)	d (mm)	L (mm)
WP 25	25	15	10,0
WP 30	30	20	13,0
WP 35	35	25	13,0
WP 40	40	30	13,0
WP 45	45	35	13,0
WP 55	55	45	16,0
WP 60	60	45	16,0
WP 65	65	55	16,0
WP 75	75	65	16,0
WP 85	85	75	16,0