


PA 700 AJF 45

Pritisna armatura, ORFS W45°

HANSA FLEX

Karakteristike

| | |
|--------------------|--|
| Područje primjene | Pritisna armatura za crijeva HD 400 |
| Priključak 1 | UN/UNF navoji matice |
| Oblik brtve 1 | plosnato brtvljenje |
| Kratika | ORFS |
| Norma | ISO 8434- 3 |
| Povezivanje | s osiguračem od izvlačenja (Interlock) |
| Opseg isporuke | Pritisna nazuvica + pritisni podnožak |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

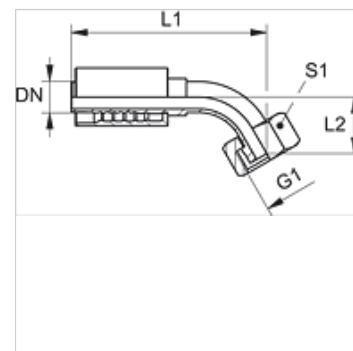

Artikli

| Naziv | DN | Veličina | Col | Radni tlak (bar) | G1 | L1 (mm) | L2 (mm) | S1 |
|---------------|----|----------|------|------------------|----------------|---------|---------|----|
| PA 713 AJF 45 | 12 | 8 | 1/2" | 413,0 | 11/16" - 16 UN | 91,5 | 21,5 | 27 |
| PA 716 AJF 45 | 16 | 10 | 5/8" | 413,0 | 1" -14 UNS | 111,0 | 20,0 | 30 |
| PA 720 AJF 45 | 19 | 12 | 3/4" | 413,0 | 1,3/16" -12 UN | 133,0 | 26,5 | 36 |
| PA 725 AJF 45 | 25 | 16 | 1" | 413,0 | 1,7/16" -12 UN | 160,5 | 31,0 | 41 |