

HK CGMM


Kućište vodilice hidraulične cilindre s dvostrukim djelovanjem 250bar

HANSA FLEX

Karakteristike

Materijal Čelični lijevi UNI 5007-G26

Primjena Suitable for cylinder HK HFR 2S

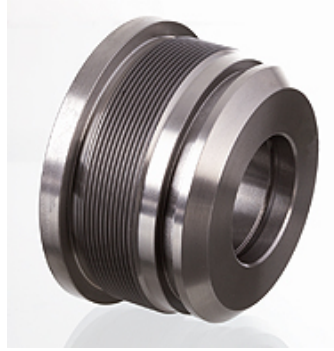

Napomena

Odgovarajući brtveni kompleti dostupni su na zahtjev.

Artikl

Naziv	$\varnothing A$ (mm)	$\varnothing D$ (mm)	$\varnothing S$ (mm)	F	L (mm)	L1 (mm)	LF (mm)	Težina (kg)
HK CGMM 114 100 050	100	114	50	M 105x2	65	55	30	2,9