


# HK DI 20

Sigurnosni i zaporni blok s ručnim rasterećenjem

**HANSA FLEX**

## Karakteristike

Izvedba	Sigurnosni ventil
Radni tlak	maks. 400 bara
Dodatno obilježje	s TÜV odobrenjem
Materijal	Seal: VITON

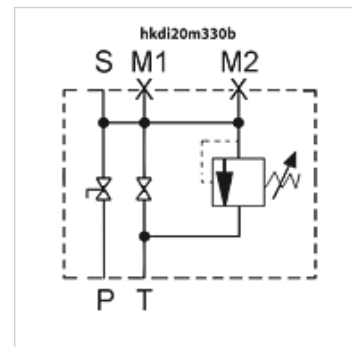

## Napomena

sigurnosni ventil je fiksno namješten, kod dodjeljivanja odgovarajućem spremnik obratiti pozornost na maksimalni tlak!

## Opis

The Safety Unit serves as a device for the protection, shut off and discharge of hydro accumulators. It is designed according to PED 2014/68/EU, article 3 paragraph 3, manufactured and considered to the European safety regulations for the operation of hydraulic accumulators. The discharge of the accumulator is manually by a ball valve or a relief valve.

viskoznost tekućina mora biti unutar sljedećih granica:

najmanje 10 mm<sup>2</sup>/s, maks. 380 mm<sup>2</sup>/s

## Napomene uz narudžbu

Pozor! Molimo da adapter za dotični spremnik naručite posebno.

## Artikli

Naziv	p max. (bar)	M1	M2	P	S	T	Težina (kg)
HK DI 20 M 330 B	330	1/2"	1/4"	1"	Priključak spremnika M 33x2	3/4"	6,8

pmax: sigurnosni ventil je fiksno namješten, – pri pridruživanju dotičnom spremniku obratiti pozornost na maksimalni tlak!

## Pribor

HK AS	Adapter spremnika za sigurnosni i zaporni blok
HK MSM	Protumatica za membranski spremnik C