


# HK DI 20

Sigurnosni i zaporni blok s ručnim rasterećenjem

**HANSA FLEX**

## Karakteristike

|                   |                   |
|-------------------|-------------------|
| Izvedba           | Sigurnosni ventil |
| Radni tlak        | maks. 400 bara    |
| Dodatno obilježje | s TÜV odobrenjem  |
| Materijal         | Seal: VITON       |

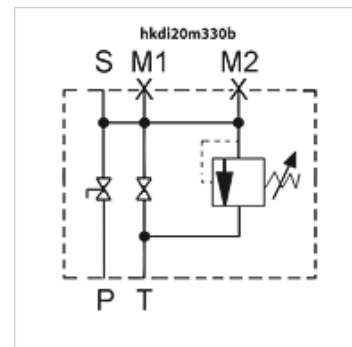

## Napomena

sigurnosni ventil je fiksno namješten, kod dodjeljivanja odgovarajućem spremnik obratiti pozornost na maksimalni tlak!

## Opis

The Safety Unit serves as a device for the protection, shut off and discharge of hydro accumulators. It is designed according to PED 2014/68/EU, article 3 paragraph 3, manufactured and considered to the European safety regulations for the operation of hydraulic accumulators. The discharge of the accumulator is manually by a ball valve or a relief valve.

viskoznost tekućina mora biti unutar sljedećih granica:

najmanje 10 mm<sup>2</sup>/s, maks. 380 mm<sup>2</sup>/s

## Napomene uz narudžbu

Pozor! Molimo da adapter za dotični spremnik naručite posebno.

## Artikli

| Naziv            | p max.<br>(bar) | M1   | M2   | P  | S                           | T    | Težina<br>(kg) |
|------------------|-----------------|------|------|----|-----------------------------|------|----------------|
| HK DI 20 M 330 B | 330             | 1/2" | 1/4" | 1" | Priključak spremnika M 33x2 | 3/4" | 6,8            |

pmax: sigurnosni ventil je fiksno namješten, – pri pridruživanju dotičnom spremniku obratiti pozornost na maksimalni tlak!

## Pribor

|        |  |
|--------|--|
| HK AS  | Adapter spremnika za sigurnosni i zaporni blok |
| HK MSM | Protumatica za membranski spremnik C           |