


WA LMA VA

Priključni element ... LMA, VA

HANSA FLEX

Karakteristike

| | |
|-------------------|---|
| Područje primjene | Priključna armatura za metalna crijeva |
| Priključak 1 | Konusni nastavak, oblik SD s pretornom maticom oblika F za uťor |
| Oblik brtve 1 | konusno brtvljenje s brtvenim prstenom |
| Norma | DIN 11851 DIN 405-1 |
| Oblik izrade | ravno |
| Materijal | Oplemenjeni 7elík |

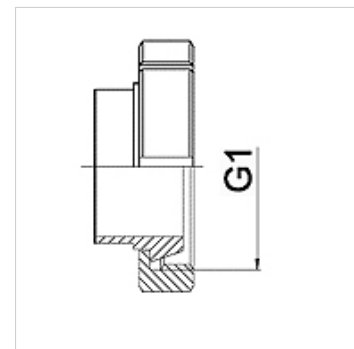

Napomene uz narudžbu

Ostale izvedbe na zahtjev

Artikl

| Naziv | DN | PN (bar) | G1 |
|--------------|-----|----------|---------------|
| WA 010 LMAVA | 10 | 40 | Rd 28 x 1/8" |
| WA 013 LMAVA | 13 | 40 | Rd 34 x 1/8" |
| WA 020 LMAVA | 20 | 40 | Rd 44 x 1/6" |
| WA 025 LMAVA | 25 | 40 | rd 52 x 1/6" |
| WA 032 LMAVA | 32 | 40 | rd 58 x 1/6" |
| WA 040 LMAVA | 40 | 40 | rd 65 x 1/6" |
| WA 050 LMAVA | 50 | 25 | rd 78 x 1/6" |
| WA 065 LMAVA | 65 | 25 | rd 95 x 1/6" |
| WA 080 LMAVA | 80 | 25 | rd 110 x 1/4" |
| WA 100 LMAVA | 100 | 25 | rd 130 x 1/4" |
| WA 125 LMAVA | 125 | 16 | Rd 160 x 1/4" |
| WA 150 LMAVA | 150 | 16 | Rd 190 x 1/4" |