

PA 700 SF6 90 4 K PLUS

Swage fitting, SFS 4-Kant, angle 90°

HANSA FLEX

Karakteristike

Područje primjene Pritisna armatura za crijeva HD 700 PLUS


Norma SAE J518
ISO 6162-2

Povezivanje s osiguračem od izvlačenja (Interlock)

Opseg isporuke Pritisna nazuvica + pritisni podnožak

Materijal Čelik

Površinska zaštita galvanski premaz

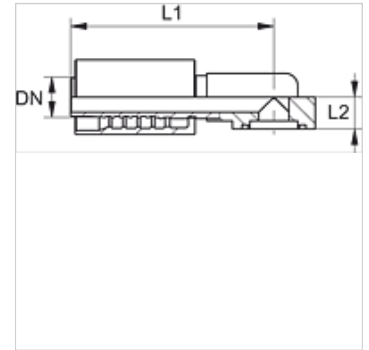

Artikli

| Naziv | DN | Veličina | Col | Veličina priрубnice | Radni tlak (bar) | L1 (mm) | L2 (mm) | Težina (kg) |
|-----------------------|----|----------|--------|---------------------|------------------|---------|---------|-------------|
| PA 732 SF6 90 4K PLUS | 31 | 20 | 1.1/4" | 1.1/4" | 420,0 | 148,5 | 38,0 | 2,45 |
| PA 740 SF6 90 4K PLUS | 38 | 24 | 1.1/2" | 1.1/2" | 420,0 | 183,0 | 42,0 | 0,48 |