


### Karakteristike

|                  |                       |
|------------------|-----------------------|
| Radni tlak       | do 500 bara           |
| Temperatura min. | -40 °C                |
| Temperatura max. | 120 °C                |
| Mediji           | Mineralna ulja        |
| Materijal        | Poliuretan 93 Shore A |

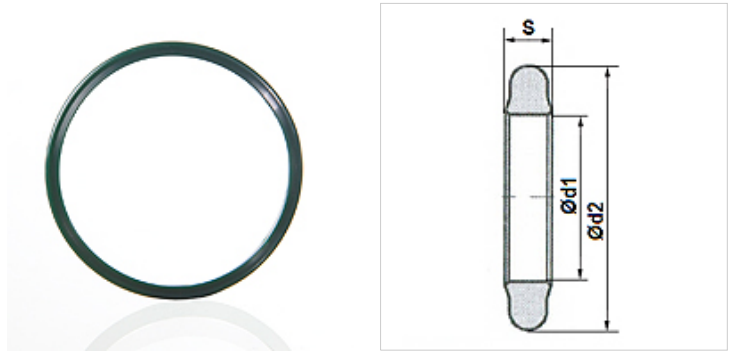

### Artikli

| Naziv | Veličina prirubnice | d1<br>(mm) | d2<br>(mm) | S<br>(mm) |
|-------|---------------------|------------|------------|-----------|
| FS-08 | 1/2"                | 18,40      | 25,40      | 3,53      |
| FS-12 | 3/4"                | 24,80      | 31,80      | 3,53      |
| FS-16 | 1"                  | 32,70      | 39,70      | 3,53      |
| FS-20 | 1.1/4"              | 37,50      | 44,50      | 3,53      |
| FS-24 | 1.1/2"              | 46,80      | 53,80      | 3,53      |
| FS-32 | 2"                  | 56,40      | 63,40      | 3,53      |
| FS-40 | 2.1/2"              | 69,40      | 76,20      | 3,53      |
| FS-48 | 3"                  | 85,30      | 91,90      | 3,53      |