


WFG 45 HJOF M (6000 PSI)

Adapter SAE prirubnice ORFS kut 45°

HANSA FLEX

Karakteristike

| | |
|--------------------|--|
| Tlačni niz | 6000 psi |
| Oblik izrade | Kutevi 45° |
| Izvedba | SAE prirubnica s vanjskim navojem |
| Opseg isporuke | s 2 polovice prirubnice, kompletom vijaka i O prstenom |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

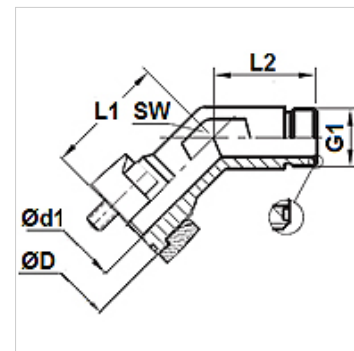

Artikli

| Naziv | Tlak PB (bar) | Veličina | G1 | Ø D (mm) | Ø d1 (mm) | L1 (mm) | L2 (mm) | SW (mm) |
|-----------------------|---------------|----------|-----------------|----------|-----------|---------|---------|---------|
| WFG 6002-45 HJOF 12 M | 400 | 3/4" | 1,3/16" -12 UN | 41,5 | 15,5 | 40,2 | 32,5 | 32 |
| WFG 6003-45 HJOF 16 M | 400 | 1" | 1,7/16" -12 UN | 47,8 | 20,5 | 47,0 | 37,4 | 41 |
| WFG 6004-45 HJOF 20 M | 350 | 1.1/4" | 1.11/16" -12 UN | 54,2 | 26,0 | 51,8 | 40,4 | 46 |
| WFG 6005-45 HJOF 24 M | 310 | 1.1/2" | 2" -12 UN | 63,7 | 32,0 | 60,5 | 45,2 | 50 |