


# FI HD E MA

Filtarski element za visokotlačni filter MA

**HANSA FLEX**

## Karakteristike

<b>Posebna obilježja</b>	ojačana verzija $\Delta p$ max. 20 bar
<b>Temperatura min.</b>	-25 °C
<b>Temperatura max.</b>	120 °C
<b>Materijal</b>	Brtva: NBR
<b>Radni tlak</b>	maks. 210 bar
<b>Primjena</b>	za tlačne filtre FI MD 315, FI HD 400

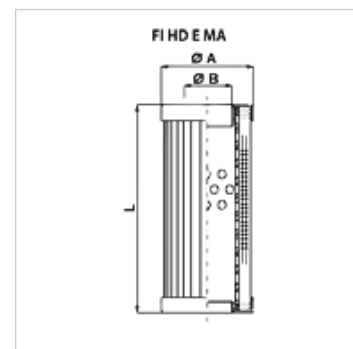

## Artikli

Naziv	Finoća filtra (µm)	Površina filtra (cm <sup>2</sup> )	Q <sub>max</sub> (L/min)	Filter material	za tip filtra	L (mm)	Ø A (mm)	Ø B (mm)	Težina (kg)
FI HD E MA 0050 A06V	6,0	470	40	anorganski	FI HD 040, 050 / FI MD 040, 050	94,0	47,0	25,5	0,26
FI HD E MA 0050 A10V	10,0	470	50	anorganski	FI HD 040, 050 / FI MD 040, 050	94,0	47,0	25,5	0,24
FI HD E MA 0090 A06V	6,0	900	70	anorganski	FI HD 070, 090 / FI MD 060, 080	172,0	47,0	25,5	0,45
FI HD E MA 0090 A10V	10,0	900	90	anorganski	FI HD 070, 090 / FI MD 060, 080	172,0	47,0	25,5	0,40
FI HD E MA 0110 A06V	6,0	1275	85	anorganski	FI HD 085, 100 / FI MD 080, 090	294,0	47,0	25,5	0,60
FI HD E MA 0110 A10V	10,0	1275	110	anorganski	FI HD 085, 100 / FI MD 080, 090	294,0	47,0	25,5	0,55
FI HD E MA 0150 A06V	6,0	2010	170	anorganski	FI HD 150, 170 / FI MD 170, 190	144,0	83,2	47,5	1,05
FI HD E MA 0150 A10V	10,0	2010	195	anorganski	FI HD 150, 170 / FI MD 170, 190	144,0	83,2	47,5	0,84
FI HD E MA 0300 A06V	6,0	3800	240	anorganski	FI HD 260, 300 / FI MD 240, 260	258,0	83,2	47,5	1,64
FI HD E MA 0300 A10V	10,0	3800	260	anorganski	FI HD 260, 300 / FI MD 240, 260	258,0	83,2	47,5	1,60

Q<sub>max</sub> - maks. volumenska struja

## je pribor uz sljedeće proizvode

FI MD GEH	Kućište za srednjotlačni filter 315 bar
FI HD GEH	Kućište za visokotlačni filter 400 bar

## je rezervni dio uz sljedeće proizvode

FI MD 315	Srednjotlačni filter 315 bar
FI HD 400	Visokotlačni filter 400 bar