

# FI ND E UF

Filtarski element za niskotlačni filter UF

**HANSA FLEX**


## Karakteristike

Temperatura min. -25 °C

Temperatura max. 120 °C

Materijal Brtva: NBR

Radni tlak maks. 10 bar

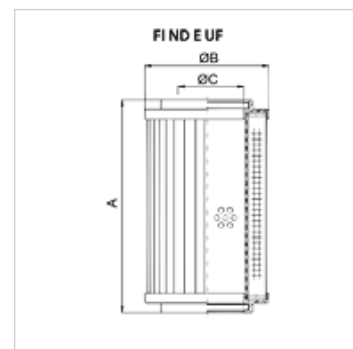

## Artikli

Naziv	Finoća filtra (µm)	Površina filtra (cm <sup>2</sup> )	Filter material	A (mm)	Ø B (mm)	Ø C (mm)	Težina (kg)
FI ND E UF 0010 A03	3,0	3260	anorganska staklena vlakna	210,0	99,0	51,5	1,00
FI ND E UF 0010 A06	6,0	3260	anorganska staklena vlakna	210,0	99,0	51,5	1,00
FI ND E UF 0011 A10	10,0	3260	anorganska staklena vlakna	210,0	99,0	51,5	0,58

for Bypass flow filter system NSF A Typ C

## je rezervni dio uz sljedeće proizvode

NSFA Typ C Postrojenje za filtriranje u sporednoj struji, tip C