



# FI SG E MP

Filtarski element za usisni filter MP

**HANSA FLEX**

## Karakteristike

|                  |                       |
|------------------|-----------------------|
| Izvedba          | bez prenosnog ventila |
| Temperatura min. | -25 °C                |
| Temperatura max. | 110 °C                |
| Materijal        | Brtva: NBR            |
| Radni tlak       | maks. 12 bara         |
| Filter material  | žičano pletivo        |

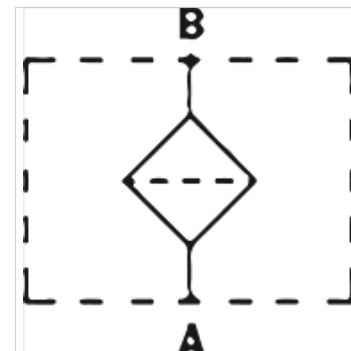

## Opis

Ovi filtri štite hidraulične pumpe od grube prljavštine iz spremnika. Montiraju se upušteno u spremnik.

## Napomene uz narudžbu

isporučuje se na zahtjev: druge fine filtarske jedinice, drugi navoji, filtri s prenosnikom ili magnetom

## Artikli

| Naziv                     | Finoća filtra<br>(µm) | Površina filtra<br>(cm <sup>2</sup> ) | Qmax<br>(L/min) | G1            | L<br>(mm) | Ø B<br>(mm) | SW<br>(mm) | Težina<br>(kg) |
|---------------------------|-----------------------|---------------------------------------|-----------------|---------------|-----------|-------------|------------|----------------|
| FI SG E MP 0078 M90       | 90                    | 290                                   | 20              | G 3/8"        | 79,0      | 52,0        | 30         | 0,16           |
| FI SG E MP 0078 M90 1/2   | 90                    | 290                                   | 28              | G 1/2"        | 79,0      | 52,0        | 30         | 0,16           |
| FI SG E MP 0095 M90 1/2   | 90                    | 470                                   | 28              | G 1/2"        | 95,0      | 70,0        | 41         | 0,16           |
| FI SG E MP 0095 M90 3/4   | 90                    | 470                                   | 66              | G 3/4"        | 95,0      | 70,0        | 41         | 0,22           |
| FI SG E MP 0135 M90 1 1/4 | 90                    | 1046                                  | 170             | G 1 1/4"      | 137,0     | 99,0        | 69         | 0,47           |
| FI SG E MP 0135 M90 1 1/2 | 90                    | 1046                                  | 170             | G 1 1/2"      | 137,0     | 99,0        | 69         | 0,47           |
| FI SG E MP 0140 M90 3/4   | 90                    | 720                                   | 66              | G 3/4"        | 141,0     | 70,0        | 41         | 0,30           |
| FI SG E MP 0140 M90 1     | 90                    | 720                                   | 130             | G 1"          | 141,0     | 70,0        | 41         | 0,30           |
| FI SG E MP 0140 M250 1    | 250                   | 720                                   | 900             | G 1"          | 141,0     | 70,0        | 41         | 0,30           |
| FI SG E MP 0140 M90 1 1/2 | 90                    | 2000                                  | 250             | G 1 1/2"      | 160,0     | 130,0       | 70         | 0,84           |
| FI SG E MP 0140 M90 2     | 90                    | 2000                                  | 470             | G 2"          | 160,0     | 130,0       | 70         | 0,84           |
| FI SG E MP 0225 M90 1 1/4 | 90                    | 1850                                  | 170             | G 1 1/4"      | 227,0     | 99,0        | 69         | 0,68           |
| FI SG E MP 0225 M90 1 1/2 | 90                    | 1850                                  | 250             | G 1 1/2"      | 227,0     | 99,0        | 69         | 0,68           |
| FI SG E MP 0225 M90 2     | 90                    | 1850                                  | 470             | G 2"          | 227,0     | 99,0        | 69         | 0,68           |
| FI SG E MP 0262 M90 2     | 90                    | 3550                                  | 470             | G 2"          | 262,0     | 130,0       | 69         | 1,25           |
| FI SG E MP 0270 M90 2 1/2 | 90                    | 3550                                  | 840             | G 2 1/2" - 11 | 272,0     | 130,0       | 101        | 1,25           |
| FI SG E MP 0270 M90 3     | 90                    | 3620                                  | 980             | G 3" -11      | 272,0     | 130,0       | 101        | 1,25           |
| FI SG E MP 0330 M90 3     | 90                    | 4160                                  | 980             | G 3" -11      | 330,0     | 130,0       | 101        | 1,30           |

Qmax - maks. volumenska struja