


FI SP R/S FK

Filtarska glava za spin-on povratni/usisni filter

HANSA FLEX

Karakteristike

Materijal aluminij

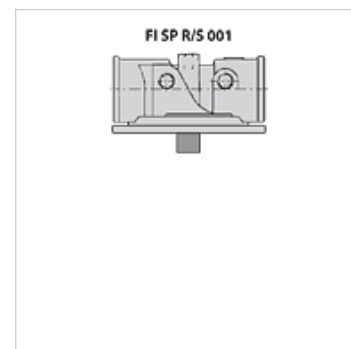

Opis

Pomoću ovih filtarskih glava spin-on filteri mogu se koristiti kao povratni filtra (R) ili kao usisni filteri (S).

Proradni tlak prenosnog ventila za povratni filter (R): 1,75 bar

Proradni tlak prenosnog ventila za usisni filter (S): 0,3 bar

Artikli

Naziv	za tip filtra	Priključak voda	Izvedba	Težina (kg)
FI SP R FK 001 G3/4	FI SP R 1 (R) with G 3/4" connection	G 3/4"	kao povratni filter	0,36
FI SP R FK 001 G11/4	FI SP R 1 (R) with G 1 1/4" connection	G 1.1/4"	kao povratni filter	1,00
FI SP R FK 002 G11/2	FI SP R 2 (R) with G 1 1/2" connection	G 1.1/2"	kao povratni filter	1,22
FI SP R FK 003 G11/2	FI SP R 3 (R) with G 1 1/2" connection	G 1.1/2"	kao povratni filter	2,86
FI SP R FK 003 SAE11/2	FI SP R 3 (R) with SAE 1 1/2" connection	1.1/2" SAE 3000 PSI/M	kao povratni filter	2,86
FI SP S FK 001 G3/4	FI SP R 1 (S) with G 3/4" connection	G 3/4"	kao usisni filter	0,36
FI SP S FK 001 G11/4	FI SP R 1 (S) with G 1 1/4" connection	G 1.1/4"	kao usisni filter	0,50
FI SP S FK 002 G11/2	FI SP R 2 (S) with G 1 1/2" connection	G 1.1/2"	kao usisni filter	1,22
FI SP S FK 003 G11/2	FI SP R 3 (S) with G 1 1/2" connection	G 1.1/2"	kao usisni filter	2,86
FI SP S FK 003 SAE11/2	FI SP R 3 (S) with SAE 1 1/2" connection	1.1/2" SAE 3000 PSI/M	kao usisni filter	2,86

je rezervni dio uz sljedeće proizvode

FI SP R 1	Spin-on povratni filter, tip 1
FI SP R 2	Spin-on povratni filter, tip 2
FI SP R 3	Spin-on povratni filter, tip 3

Dodatni elementi

FI SP E MP	Filtarski element za spin-on filter MP
------------	--