

# TUE FF PN16

Fiksna prirubnica, s ozubljenim nastavkom, PN10/16, čelik VZ

**HANSA FLEX**

## Karakteristike


**Priključak 1** fiksna prirubnica  
za stupanj tlaka PN16

**Oblik izrade** ravno

**Oblik brtve 1** plosnato brtvljenje

**Područje primjene** Industrija

**Norma** DIN EN 1092-1

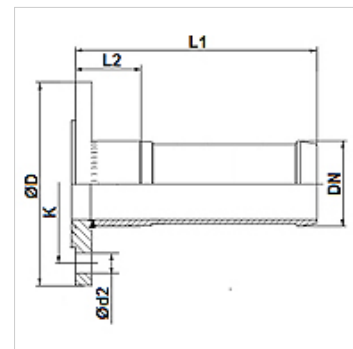

## Artikli

| Naziv           | DN* | Veličina | Col    | Ø D<br>(mm) | K<br>(mm) | Ø d2<br>(mm) | N<br>(mm) |
|-----------------|-----|----------|--------|-------------|-----------|--------------|-----------|
| TUE 20 FF PN16  | 20  | 12       | 3/4"   | 105,0       | 75        | 14           | 4         |
| TUE 25 FF PN16  | 25  | 16       | 1"     | 115,0       | 85        | 14           | 4         |
| TUE 32 FF PN16  | 32  | 20       | 1.1/4" | 140,0       | 100       | 18           | 4         |
| TUE 38 FF PN16  | 40  | 24       | 1.1/2" | 150,0       | 110       | 18           | 4         |
| TUE 50 FF PN16  | 50  | 32       | 2"     | 165,0       | 125       | 18           | 4         |
| TUE 63 FF PN16  | 63  | 40       | 2.1/2" | 185,0       | 145       | 18           | 4         |
| TUE 75 FF PN16  | 75  | 50       | 3"     | 200,0       | 160       | 18           | 8         |
| TUE 102 FF PN16 | 100 | 64       | 4"     | 220,0       | 180       | 18           | 8         |

N = broj rupa

## Pribor

**KS AL** Stezna ljuska, aluminijska

**KS FIX AL** Stezna ljuska za spajanje zatikom, aluminij

## Dodatni elementi

**FD C4400** Plosnata brtva